

Electronic sensor for luminaire devices
Sensore elettronici per dispositivi di illuminazione

Product Feature

- Conform to new ERP standards; low stand-by power.
- 5.8GHz microwave license-free ISM wave band; bulk order are compliant with RED&TUV approval.
- Compact size design, can be built-in most of light fixtures.
- Simple to operate: adjusting DIP switches to change detection area, hold time, daylight sensor and other parameters.
- Input and output terminals are convenient for connecting.
- Five year warranty



MWS MOTION LN V1



MWS MOTION LN V2

Parameter

Input			
Rated Voltage	220-240VAC 50/60Hz		
Stand-by Power	≤0.3W		
Surge Test	L--N: 1kV		
Output			
Output Control	ON-OFF		
Load Capacity	MWS MOTION LN V1:	400W (Inductive/LED); 800W (Resistive)	MWS MOTION LN V2: 200W (Inductive/LED); 400W (Resistive)
Max. Surge Capacity	MWS MOTION LN V1:	30A (50% I _{peak} , t _{width} =500us, 230Vac full load, cold start); 60A (50% I _{peak} , t _{width} =200us, 230Vac, full load, cold start)	
	MWS MOTION LN V2:	20A (50% I _{peak} , t _{width} =500us, 230Vac full load, cold start); 40A (50% I _{peak} , t _{width} =200us, 230Vac, full load, cold start)	
Sensor Parameter			
Operating Frequency	5.8 GHz ±75MHz, ISM wave band.		
Transmitting power	1mW Max.		
Detecting Radius	Ceiling installation 3m height: 1m/s ≥ 2.5m, 0.3m/s ≥ 3.5m Test condition: Product setting 100% sensitivity, 60 m ² indoor open space		
Mounting Height	2.5-6m (ceiling mounting), 2-3m (wall mounting)		
Environment			
Operating Temperature	-25~60°C		
Storage Temperature	-40°C~80°C, Humidity: ≤85% (Non-condensing)		
Maximum Shell Temperature (Tc)	80°C		
Certificate Standard			
Certificate	CE, RED, TUV		
Environmental Requirement	Compliant to RoHS 2.0, Reach		
IP Rating	IP20		
Product Category	Class II		
Other			
Product Model	MWS MOTION LN V1	MWS MOTION LN V2	
Wiring	Press-in type terminal block, wiring 0.75-1.5 mm ²	Press-in type terminal block, wiring 0.5-0.75mm ²	
Installation	Built-in		
Package	Bubble bag + Clapboard + Carton(K=A)		
Net Weight	MWS MOTION LN V1	37.8±3g	MWS MOTION LN V2: 25.2±3g
Lifetime	5 years warranty @Ta		


Electronic sensor for luminaire devices Sensore elettronici per dispositivi di illuminazione

Function


- | | |
|--|---|
| <input type="radio"/> ON-OFF function | Setting daylight sensor to “disable” or ambient brightness is lower than the preset daylight sensor value, when detecting moving signals sensor starts working and light will turn on. When hold time ends, light will turn off. |
| <input type="radio"/> 2-step dimming | N/A |
| <input type="radio"/> 3-step dimming | N/A |
| <input type="radio"/> Override function (MWS MOTION LN V2) | Switch it on and off 5 times within 5 seconds(on-off-on-off-on-off-on-off-on-off-on) will turn on constant on mode, the sensing mode will restored after it power on again. Note: After switch on and off five times, the lamp will flash 3 times and then enter constant mode. |
| <input type="radio"/> Daylight harvesting | N/A |
| <input type="radio"/> Daylight priority | N/A |
| <input type="radio"/> High-low sensitivity | N/A |
| <input type="radio"/> Grouping | N/A |

Product Information

- Dimension (units: mm)

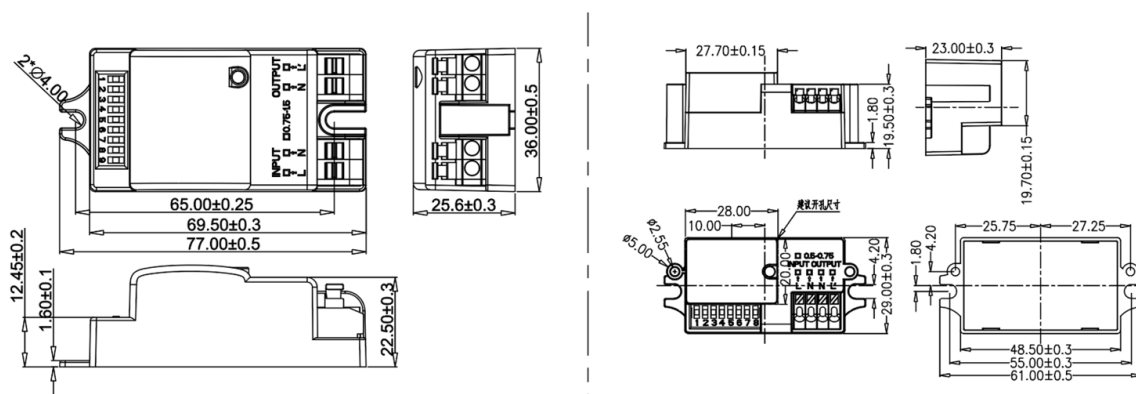


- Structure

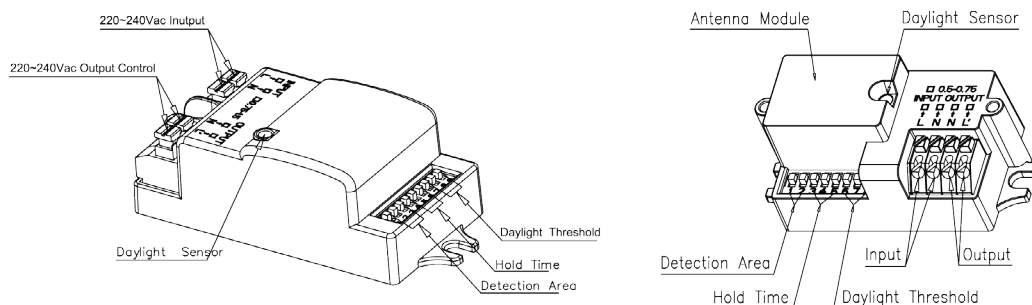

Electronic sensor for luminaire devices Sensore elettronico per dispositivi di illuminazione


● Wiring

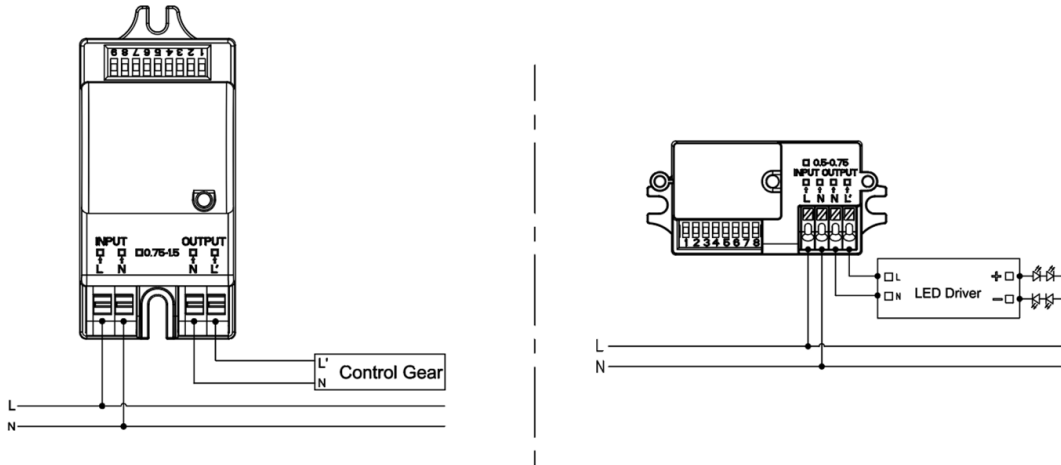

Note:

*The sensor is designed for connect one load only. Connect more than one loads may damage the sensor.

● Installation instruction

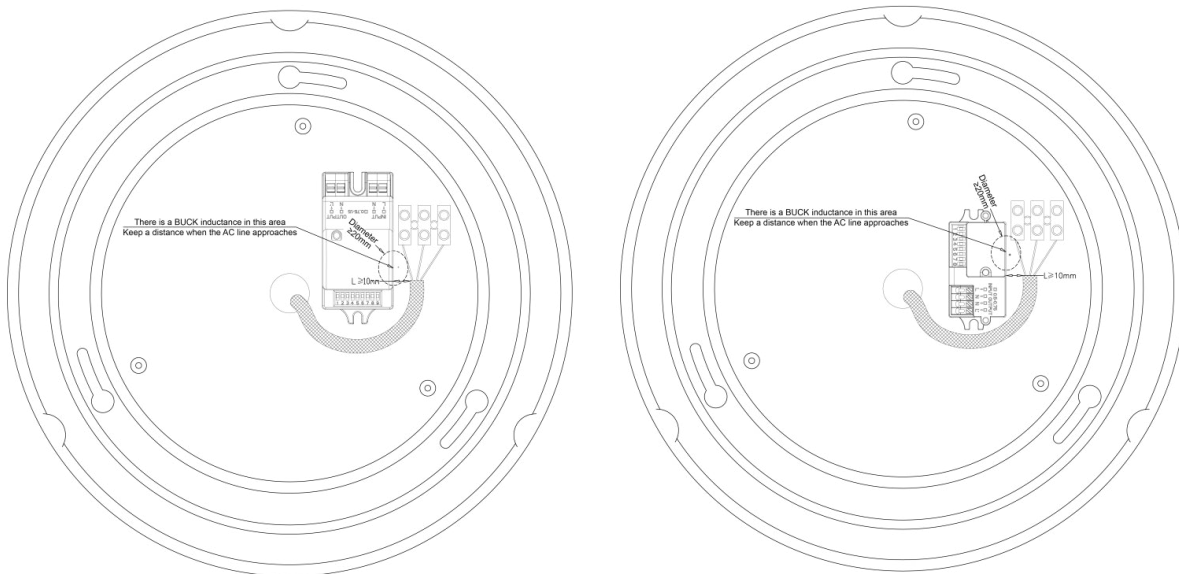


Note:

When installation, please pay attention to the front of microwave antenna is not allowed to be blocked by metal.


The AC incoming line needs to keep a distance of more than 10mm from the BUCK inductance, Otherwise it will cause conduction to fail. As shown in the following figure.

Electronic sensor for luminaire devices
Sensore elettronici per dispositivi di illuminazione

Detection Range

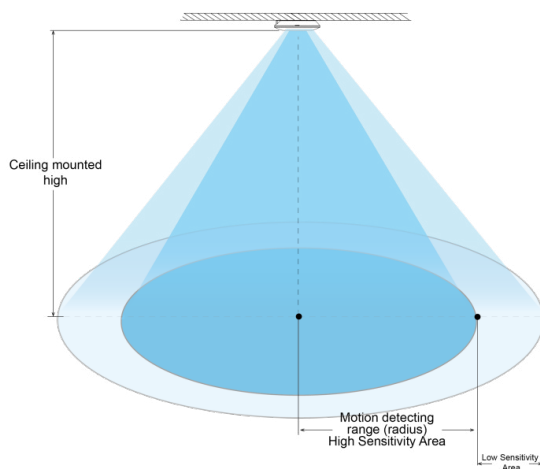

DIP Switch Setting



Detection Area			Hold Time			Daylight Sensor						
1	2	3	4	5	6	7	8	9				
ON	ON	ON	100%	Around 4meters	ON	ON	ON	5S	ON	ON	ON	2Lux
-	ON	ON	75%	Around 3.5 meters	-	ON	ON	30S	ON	ON	-	10Lux
ON	-	ON	50%	Around 3 meters	ON	-	ON	90S	-	ON	-	25Lux
-	-	ON	25%	Around 1.5 meters	-	-	ON	3min	ON	-	-	50Lux
-	-	-	10%	Around 1.0 meter	ON	ON	-	20min	ON	-	-	Disable
-	-	-			-	-	-	30min	-	-	-	Disable

Initialization

After power on, the sensor automatically turns on light to 100% brightness and turns off light after 10 seconds. During initialization, sensor is not able to detect movement.

Default setting

Sensitivity: 100%, Hold time: 5s, Daylight sensor: Disable

Application Notice

- Sensor should be installed by a professional electrician. Please turn off power before installing, wiring, or setting the DIP switches.
- Microwaves cannot penetrate metal. Do not place product in a closed or a half-closed metal lamp. Neither metal nor glass is not allowed to cover above the product. If antenna needs to pass through the metal plate, please ensure that the top of sensor is close to the metal plate.
- The installation spacing between sensors is recommended to be greater than 2m. Keep it away from wireless devices such as switches and routers, and the installation spacing between sensors and routers is recommended to be greater than 2m. The antenna surface of the microwave sensor should be away from the input AC and output DC to avoid low/high frequency signals affecting the normal operation of the microwave sensor antenna.
- Sensitivity area is related to moving speed of objects, size of moving objects, mounting height, mounting angle, working environment, reflecting materials and etc.. Given detecting area is typical

Electronic sensor for luminaire devices Sensore elettronici per dispositivi di illuminazione

- This model is suitable for ceiling installation. If wall installation is used, the microwave sensor sensing detection area is greatly increased, and it may cause the phenomenon of microwave penetrate wall or the light not going out. So please adjust the sensitivity to 10%. If the sensitivity 10% can not be used, please avoid to the wall installation or ask the manufacturer for technical support.
- The daylight thresholds are measured on a sunny day without shadow and in an ambient light diffuse reflection status. Different environment and climate cause different brightness values that daylight sensor measures.
- Sensor should not be covered or hided by metal, PCB, LED tray etc..The spacing between the sensor antenna and surrounding materials should be greater than 5mm. There should be no metal or PCB tracks near the sensor antenna, above or below it. The recommended thickness of cover is 2mm, and keep the spacing between the sensor antenna and cover is greater than 3.2mm.
- Vibration signals will be regarded as moving signals to trigger sensor. Installing sensor should be away from the object that vibrates for a long time, such as large metal equipment, pipes, air conditioning outlets, exhaust vents, smoke exhaust machine ports, shaking fans, etc. Pets in detecting area may cause false trigger.
- The antenna surface of microwave module should be away from input AC, output DC, rectifier bridge, transformer, switch tube and other high-power devices to avoid high frequency signals affecting the normal operation of microwave sensor's antenna.
- Sensor is for indoor use only. The waterproof effect for outdoor or half-outdoor use will be affected. Wind, rain, and moving objects may cause false triggering. When the sensor is installed in a metal lamp, a metal reflective surface or a small enclosed environment, the microwave will be reflected many times and cause false triggering, please reduce the sensitivity or ask the manufacturer for technical support.
- When ambient temperature is over 80°C, over temperature protection may be triggered (automatic recovery after cooling)
- For the new installation environment, it is recommended to test 5pcs samples before installation.