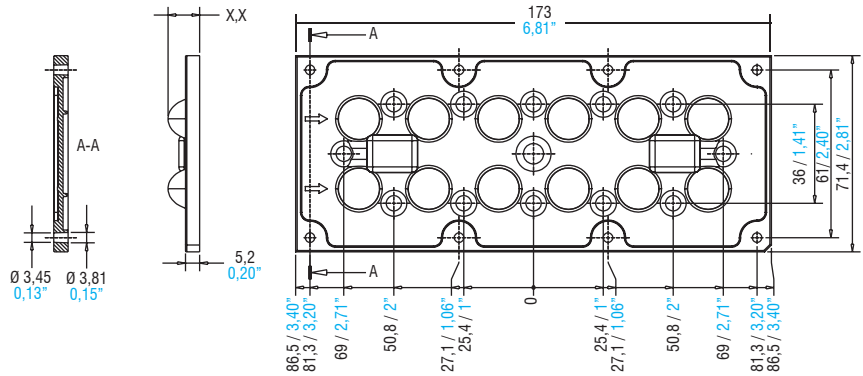
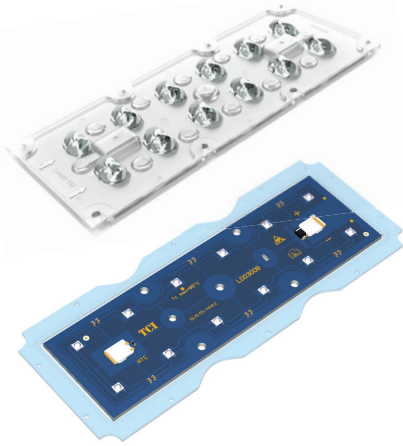


6x2 LENSES FOR IP65 STREET APPLICATIONS

Lenses

Made in Italy



4



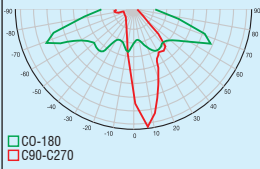
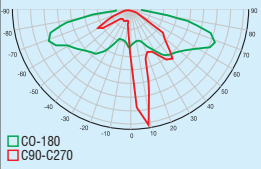
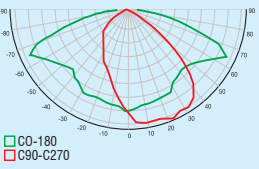
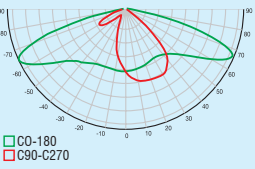
LENSES & REFLECTORS

| Article Articolo | 6x2 STREET | 6x2 STREET | 6x2 STREET | 6x2 STREET |
|--|----------------|--------------|---------------------------|----------------------|
| Description Descrizione | IESNA TYPE III | IESNA TYPE I | IESNA TYPE V 120° FWHM | IESNA TYPE II - ME3A |
| Code - Codice | 468780098 | 468780099 | 468780101 | 468780102 |
| LED type | 3535 - 5050 | 3535 - 5050 | 3535 - 5050 | 3535 - 5050 |
| Height lens | 8,75 | 8,32 | 8,62 | 8,86 |
| Polar distribution Distribuzione polare | | | | |
| Silicon Gasket for IP65 | 468780106 | 468780106 | 468780106 | 468780106 |

| Article Articolo | 6x2 STREET | 6x2 STREET | 6x2 STREET | 6x2 STREET |
|--|----------------|---------------|----------------|----------------|
| Description Descrizione | IESNA TYPE III | IESNA TYPE II | IESNA TYPE III | IESNA TYPE III |
| Code - Codice | 468780103 | 468780104 | 468780105 | 468780261 |
| LED type | 3535 | 3535 | 3535 - 5050 | 3535 |
| Height lens | 9,08 | 10,81 | 9,41 | 10,17 |
| Polar distribution Distribuzione polare | | | | |
| Silicone Gasket for IP65 | 468780106 | 468780106 | 468780106 | 468780106 |



For additional technical informations see www.tci.it

| Article Articolo | 6x2 STREET | 6x2 STREET | 6x2 STREET | 6x2 STREET |
|--|---|---|--|---|
| Description Descrizione | IESNA TYPE II | IESNA TYPE III | IESNA TYPE II | IESNA TYPE II MEDIUM |
| Code - Codice | 468780262 | 468780263 | 468780264 | 468780265 |
| LED type | 3535 - 5050 | 3535 | 3535 - 5050 | 3535 - 5050 |
| Height lens | 9,42 | 8,41 | 8,41 | 10,02 |
| Polar distribution Distribuzione polare |  |  |  |  |
| Silicon Gasket for IP65 | 468780106 | 468780106 | 468780106 | 468780106 |

Technical notes for Optics

- Uniform light distribution
- High efficiency
- Ideal for street and outdoor lighting
- Material: Optical Grade PMMA 8N
- Dimensions (LxWxH): 173x71,4xH mm
- Max allowed temperature: -40...90°C.
- Fixing with flat head screws. Tightening torque: 0,48 Nm
- Packaging unit: 200 pcs
- IP65 with silicone gasket

Note tecniche per le Ottiche

- Distribuzione di luce uniforme
- Alta efficienza
- Ideali per illuminazione stradale e da esterno
- Materiale: Optical Grade PMMA 8N
- Dimensioni (LxWxH): 173x71,4xH mm
- Temperatura massima: -40...90°C
- Fissaggio tramite viti a testa piatta. Coppia di serraggio: 0,48 Nm
- Confezione da 200 pezzi
- IP65 con guarnizione in silicone