


Mini reattori elettronici multilampada - multipotenza Multi-lamp and multi-power mini electronic ballasts

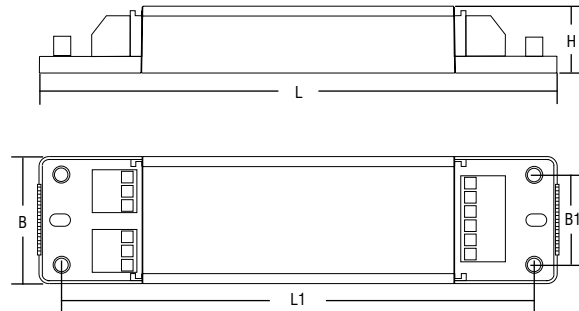

Articolo Article	Codice Code	W	Lampade Lamp	Attacco Cap	Dimensioni - Dimensions (mm)					λ	ta °C	tc °C	Peso Weight gr.	Confezioni Box
					L	L1	B	B1	H					
MB 142	137987T	1x26 1x26 1x32 1x42	TC-D/E TC-T/E TC-T/E TC-T/E	G24q-3 GX24q-3 GX24q-3 GX24q-4	155	140	38	25	20	0,97	-15 +55	85	100	30

Schema di collegamento a pagina 58 n° 34 - Wiring diagram page 58 n° 34

MB 213	137988/213	2x13 2x13	TC-D/E TC-T/E	G24q-2 GX24q-2	155	140	38	25	20	0,95	-15 +60	80	100	30
MB 218	137988T	2x18 2x18	TC-D/E TC-T/E	G24q-2 GX24q-2	155	140	38	25	20	0,97	-15 +60	85	100	30
MB 226	137989T	2x26 2x26 2x18-24 2x18-24 2x22	TC-D/E TC-T/E TC-L TC-F T-R5	G24q-3 GX24q-3 2G11 2G10 2GX13	155	140	38	25	20	0,98	-15 +50	85	100	30

Schema di collegamento a pagina 56 n° 4 - Wiring diagram page 56 n° 4

Norme di riferimento Reference Norms:

EN 55015
EN 60598-2-22
EN 60929
EN 61000-3-2
EN 61347-2-3
EN 61547
VDE 0710-T14

Tensione Nominale Rated Voltage

220 ÷ 240 V

Tensione di utilizzo Operating range

198 ÷ 264 V

Tensione DC DC Voltage

176 ÷ 264 V

Frequenza Frequency

0/50...60 Hz

Potenza Power

13 ÷ 42 W

- Alimentatore elettronico da incorporare dalle dimensioni compatte.
- Utilizzabile per apparecchi di illuminazione in classe di protezione II.
- Adatto al collegamento con apparecchi di emergenza in base alla EN 60598-2-22.
- Accensione con preriscaldamento per aumentare la durata della lampada.
- Efficienza energetica (EEI=A2)
- Morsetti ad innesto rapido (sezione conduttore 0,5 ÷ 1,5 mm²).
- Morsetti in ingresso con possibilità di rimando sull'alimentazione.
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
 - extra tensioni di rete;
 - disconnessione della lampada (riaccensione con preriscaldamento);
 - lampada guasta;
 - lampada fine vita.

- Compact size electronic ballast to be built-in.
- It can be used for lighting equipment in protection class II.
- Suitable for connection to emergency equipment in compliance with EN 60598-2-22.
- Start with pre-heating to increase the life of the lamp.
- Energy efficiency (EEI=A2).
- Push-wire connections (connector cross section area 0,5 ÷ 1,5 mm²).
- Input terminal blocks with looping possibility on feed.
- Ballast can be secured with slots for screws.
- Protections:
 - mains voltage spikes;
 - disconnection of the lamp (restart with preheating);
 - lamp failure;
 - end of lamp life.

0,5 - 1,5 [□]

