

GA-017 PRO

Track adapter with built-in LED driver
Adattatore da binario con LED driver incorporato

Made in Europe 

constant CURRENT

RIPPLE FREE

ERAC     SELV 60V



2kV DIFF. 4kV COMM.  ACTIVE PFC  DIP-SWITCH  SEC. SWITCH  SAFETY PROTECTIONS

⁽¹⁾ Referred to $V_{in} = 230\text{ V}$, 100% load
Riferito a $V_{in} = 230\text{ V}$, carico 100%

Rated Voltage
Tensione Nominale
220 ÷ 240 V

Frequency
Frequenza
50-60 Hz

Rated Current
Corrente Nominale
0,17 A

Inrush Current
Corrente di Spunto
5 A - 50 μ S

Max. pcs for MCB B16A
50


Article Articolo	P out W	V out DC	I out DC	V out max.	ta °C	tc °C	λ max. Power Factor	η max. Efficiency ⁽¹⁾
GA-017 PRO	8,8	5...44	200 mA	59	0...+35	80	0,95	>87
	11	5...44	250 mA					
	13,2	5...44	300 mA					
	15,4	5...44	350 mA					
	17,6	5...44	400 mA					
	19,8	5...44	450 mA					
	22	5...44	500 mA					
	24,2	5...44	550 mA					
	26,4	5...44	600 mA					
28,6	5...44	650 mA						
31	5...44	700 mA						

Output Power
Potenza Uscita
1 ÷ 31 W



Output current ripple
 $\leq 3\%$ ⁽¹⁾

Article Articolo	Code Codice	Color Colore
GA-017 PRO	127982W	White - Bianco RAL 9016
GA-017 PRO	127982G	Grey - Grigio RAL 7040
GA-017 PRO	127982B	Black - Nero RAL 9005

Pcs per box - pezzi per scatola: 20

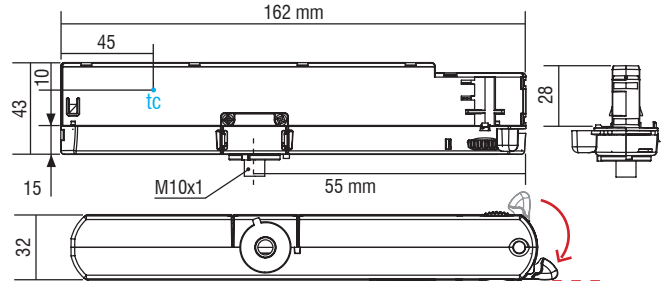

WARNING: During installation do not exceed the limit indicated - - Risk of breakage.
ATTENZIONE: in fase di installazione non superare questo limite - - Pericolo di rottura.

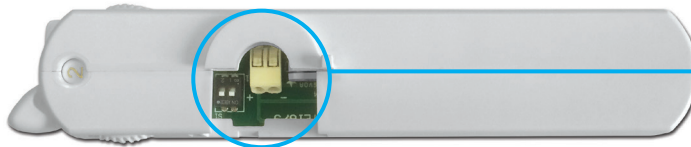

Features

- **Switchable driver.**
- A new breakthrough in luminaire design.
- Puts the luminaire design first.
- High power available in a very reduced space.
- Easy to mount through inventive nipple design.
- Compatible with NA Pro and Pulse 3-phase tracks.
- Multipower device supplied with dip-switch for the selection of the output current.
- Active Power Factor Corrector.
- Class II protection against electric shock for direct or indirect contact.
- Current regulation $\pm 5/6\%$ including temperature variations.
- Output push-in terminal blocks: 0,2...0,75 mm².
- Protezioni:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads.
- Thermal protection = C.5.a.

Caratteristiche

- **Alimentatore non regolabile.**
- Design all'avanguardia.
- Il design della lampada prima di tutto.
- Elevata potenza disponibile in uno spazio molto ridotto.
- Facile da montare con innovativi attacchi.
- Compatibile con binario NA Pro e Pulse 3-phase.
- Dispositivo multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- PFC attivo.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Corrente regolata $\pm 5/6\%$ incluse variazioni di temperatura.
- Morsetti di uscita ad innesto rapido: 0,2...0,75 mm².
- Protezioni:
 - termica e cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi.
- Protezione termica = C.5.a.

7 YEARS WARRANTY
3% FAILURE RATE

10 YEARS WARRANTY
5% FAILURE RATE

PRODUCER'S LIABILITY
TCL

WARRANTY TO THE END
10 YEARS
ACCORDING TO THE CONTRACTOR'S CONDITIONS

230V LED driver track adapters
Alimentatore LED 230V per adattatori da binario

10.1