


DALI DT8 dimmer



Weight - Peso gr. 210 / 7,4 oz.
Pcs - Pezzi 1

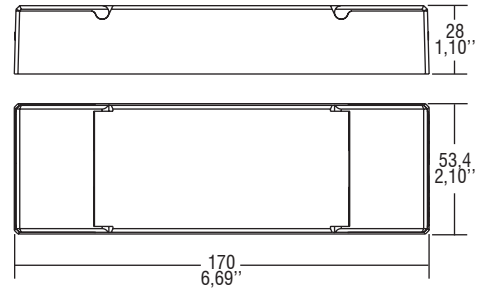

LOOPING


Rated Voltage
Tensione Nominale
12 ÷ 36 V

Frequency
Frequenza
50-60 Hz

Standards compliance
EN 62386-209

Article Articolo	Code Codice	VDC in	V out DC	I out DC	ta °C
SR-2309 FA-CCT	181209	12 ÷ 36	4x12/36 Vdc	20 A max. ⁽¹⁾	-25...+50

TW application - Applicazione TW

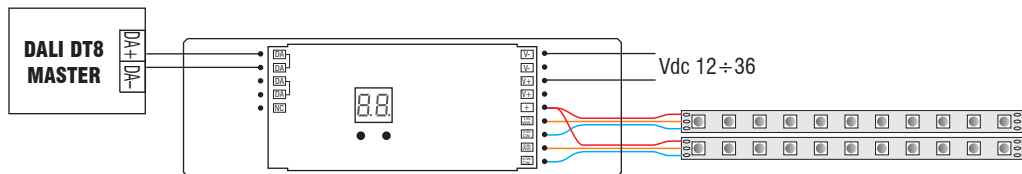

Rated voltage	Single channel power	Total power
12 V	60 W	240 W
24 V	120 W	480 W
36 V	180 W	720 W

Features

- Double input and DALI terminal blocks to loop other interface.
- Features DALI dimming (0/0,1 - 100 %).
- Suitable for constant voltage.
- Compatible with standard DT8 interfaces.
- Dual control colour and temperature
 - The DALI colour control functionality has not been verified.
- DALI address can be manually assigned and displayed via digital display.
- ⁽¹⁾ Maximum current on single channel 5A.

Caratteristiche

- Doppia morsettiera lato rete e DALI per rimando ad altra interfaccia.
- Caratteristiche della regolazione DALI (0/0,1 - 100 %).
- Adatto per carichi LED in tensione.
- Compatibile con interfacce DT8 DALI standard.
- Controllo doppio colore e temperatura
 - La funzionalità controllo colore DALI non è stata verificata.
- L'indirizzo DALI può essere assegnato manualmente e visualizzato tramite display digitale.
- ⁽¹⁾ Corrente massima singolo canale 5A.