

INGRESSO

- Nominale AC: 220/240 Vac $-10/+10\%$ 50/60Hz.
- Range DC: 176/275 Vdc per applicazioni d'emergenza secondo EN 50171/EN 50172. I_{max}=0.18A
- Morsettiera 1 x 0.5... 1.5 mm².
- Corrente massima: 0.15 A.
- Fattore di potenza λ : 0.95 @ P_{out} >6W
- Armoniche corrente assorbita: secondo EN 61000-3-2.
- Inrush current: 5A 50uS.

USCITA

- Isolamento SELV.
- Morsettiera 1 x 0,75... 1.5 mm².
- Selezione corrente e tensione di uscita tramite DIP switch (vedi tabella).
- Potenza massima e precisione di corrente
11,5W @ 250mA $\pm 7\%$ (10...49V)
13W @ 280mA $\pm 6\%$ (10...49V)
14,5W @ 310mA $\pm 6\%$ (10...49V)
15,5W @ 340mA $\pm 6\%$ (10...48V)
16,7W @ 370mA $\pm 5\%$ (10...48V)
18W @ 400mA $\pm 5\%$ (10...47V)
19,2W @ 430mA $\pm 5\%$ (10...47V)
20,5W @ 460mA $\pm 5\%$ (10...47V)
21,5W @ 490mA $\pm 5\%$ (10...46V)
22,8W @ 520mA $\pm 5\%$ (10...46V)
23,7W @ 550mA $\pm 5\%$ (10...45V)
24,5W @ 580mA $\pm 5\%$ (10...44V)
25,75W @ 610mA $\pm 5\%$ (10...44V)
26W @ 640mA $\pm 5\%$ (10...41V)
26W @ 670mA $\pm 5\%$ (10...39V)
26W @ 700mA $\pm 5\%$ (10...37V)
- Tensione in uscita massima: <59 VDC.
- Efficienza massimo carico: 88%.
- Consumo in standby : < 0.5W

REGOLAZIONE

- Regolabile con segnale DALI (EN 62386 101/102 ed. 2).
- AM DIMMING 1-100% (corrente minima 7mA).
- Pulsante collegabile su lato primario tra fase e morsetto DA (impedenza 170Kohm).
- Ripristino del livello di regolazione al ritorno dell'alimentazione (regolazione PUSH-SWITCH).
- Possibilità di abilitare BILEVEL N.

PROTEZIONI

- Protezione al corto circuito e al circuito aperto.
- Protezione al sovraccarico e di temperatura (C.5.a della EN 61347-1).
- All'ingresso, contro sovratensioni impulsive di rete (secondo EN 61547) fino a 2KV N-L , 4KV N-GND e 4KV L-GND.

INPUT

- Nominal AC: 220/240 Vac $-10/+10\%$ 50/60Hz.
- Range DC: 176/275 Vdc for emergency application according to EN 50171/EN 50172. I_{max}=0.18A
- Terminal block for up to 1 x 0.5...1.5 mm².
- Max Input Current: 0.15A.
- Power factor λ : 0.95 @ P_{out} >6W.
- Harmonic content of mains current: according to EN 61000-3-2.
- Inrush current: 5A 50uS.

OUTPUT

- SELV insulation on output.
- Terminal block for up to 1 x 0,75...1.5 mm².
- Selection of current and voltage output through Dip switch (See table)
- Max output power and current precision
11,5W @ 250mA $\pm 7\%$ (10...49V)
13W @ 280mA $\pm 6\%$ (10...49V)
14,5W @ 310mA $\pm 6\%$ (10...48,5V)
15,5W @ 340mA $\pm 6\%$ (10...48V)
16,7W @ 370mA $\pm 5\%$ (10...48V)
18W @ 400mA $\pm 5\%$ (10...47V)
19,2W @ 430mA $\pm 5\%$ (10...47V)
20,5W @ 460mA $\pm 5\%$ (10...47V)
21,5W @ 490mA $\pm 5\%$ (10...46V)
22,8W @ 520mA $\pm 5\%$ (10...46V)
23,7W @ 550mA $\pm 5\%$ (10...45V)
24,5W @ 580mA $\pm 5\%$ (10...44V)
25,75W @ 610mA $\pm 5\%$ (10...44V)
26W @ 640mA $\pm 5\%$ (10...41V)
26W @ 670mA $\pm 5\%$ (10...39V)
26W @ 700mA $\pm 5\%$ (10...37V)
- Max. Output voltage: <59 VDC.
- Efficiency @full load: 88%.
- Standby consumption : < 0.5W

DIMMING

- Dimmable by DALI (EN 62386 101/102 ed. 2).
- AM DIMMING 1-100% (minimum current 7mA).
- Terminal block on primary side for push button; connection between phase and DA terminal block (Impedance 170Kohm).
- Dimming level memory at mains restore (for PUSH-SWITCH dimming).
- BILEVEL N function as option

PROTECTIONS

- Against short circuit and open circuit.
- Thermal and overload protection (C.5.a EN 61347-1).
- Against input overvoltages from mains (according to EN61547) up to 2KV N-L , 4KV N-GND e 4KV L-GND.

ENTE EMITTENTE: DT Compilato _____ Visto _____

FILTRO ANTIDISTURBO EMI

- Secondo EN55015.

AMBIENTE

- Temp. ambiente: -25...45 °C.
- tc = 80 °C.
- tc life 50000H = 80°C.

SICUREZZA

- Hi-pot test: 3.75 kV, 100% per 2 sec.

NORMATIVE

- EN 61347-1 ; EN 61347-2-13 ; EN 61547 ; EN 55015 ; EN 61000-3-2 ; EN62384 DIN VDE 0710 teil 14.
- IEC 62386-102 IEC 62386-207,DALI2
- KEMA KEUR / ENEC05.

EMI

- According to EN55015.

AMBIENT


- Ambient Temp.: -25...45 °C.
- Tc = 80 °C.
- tc life 50000H = 80°C.

SAFETY

- Hi-pot test: 3.75 kV, 100% for 2 sec.

STANDARDS

- EN 61347-1 ; EN 61347-2-13 ; EN 61547 ; EN 55015 ; EN 61000-3-2 ; EN62384 DIN VDE 0710 teil 14.
- IEC 62386-102 IEC 62386-207,DALI2
- KEMA KEUR / ENEC05.

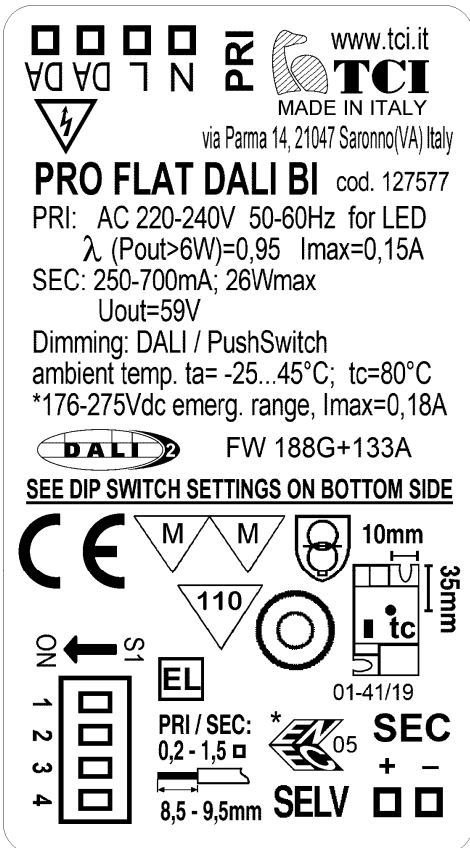

www.tci.it
TCI
MADE IN ITALY
via Parma 14, 21047 Saronno(VA) Italy

PRO FLAT DALI BI cod. 127577
PRI: AC 220-240V 50-60Hz for LED
 λ (Pout>6W)=0,95 I_{max}=0,15A
SEC: 250-700mA; 26W_{max}
U_{out}=59V
Dimming: DALI / PushSwitch
ambient temp. ta= -25...45°C; tc=80°C
*176-275Vdc emerg. range, I_{max}=0,18A

DALI 2 FW 188G+133A
SEE DIP SWITCH SETTINGS ON BOTTOM SIDE

CE, M, M, 110, 10mm, 35mm, tc, 01-41/19, EL, PRI / SEC: 0,2 - 1,5, SELV, 8,5 - 9,5mm, SEC, +, -




www.tci.it
TCI
MADE IN ITALY
via Parma 14, 21047 Saronno(VA) Italy
PRO FLAT DALI


| Pout | SEC | 1 | 2 | 3 | 4 |
|---------|--------|----|----|----|----|
| 11,5 W | 250 mA | - | - | - | - |
| 13 W | 280 mA | - | - | - | ON |
| 14,5 W | 310 mA | - | - | ON | - |
| 15,5 W | 340 mA | - | - | ON | ON |
| 16,7 W | 370 mA | - | ON | - | - |
| 18 W | 400 mA | - | ON | - | ON |
| 19,2 W | 430 mA | - | ON | ON | - |
| 20,5 W | 460 mA | - | ON | ON | ON |
| 21,5 W | 490 mA | ON | - | - | - |
| 22,8 W | 520 mA | ON | - | - | ON |
| 23,7 W | 550 mA | ON | - | ON | - |
| 24,5 W | 580 mA | ON | - | ON | ON |
| 25,75 W | 610 mA | ON | ON | - | - |
| 26 W | 640 mA | ON | ON | - | ON |
| 26 W | 670 mA | ON | ON | ON | - |
| 26 W | 700 mA | ON | ON | ON | ON |

Before use, always check S50dipswitch settings


ENTE EMITTENTE: DT Compilato _____ Visto _____

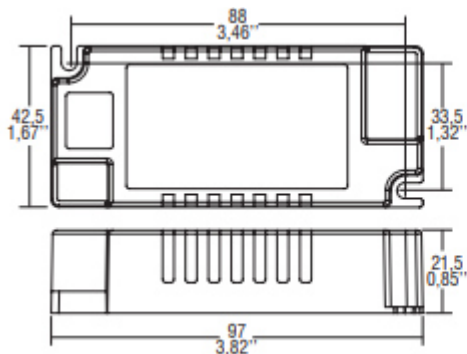

Wiring diagram - Schema di collegamento (Max. LED distance on page info8 - Massima distanza LED a pagina info8)

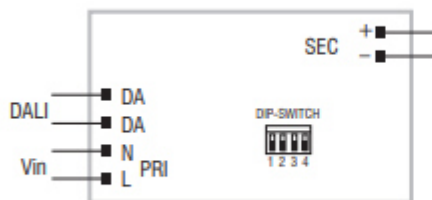

DALI diagram
Collegamento DALI

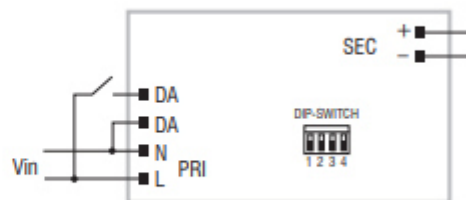

PUSH SWITCH diagram
Collegamento PUSH SWITCH

REGOLAZIONE PUSH-SWITCH


Regolazione della luminosità 0/1 - 100 % mediante la funzione PUSH SWITCH (tensione di rete):

- una pressione breve per accendere e spegnere;
- una pressione prolungata per aumentare o diminuire l'intensità luminosa;
- la regolazione si ferma automaticamente ai valori minimi e massimi;
- per un nuovo comando accensione, regolazione o spegnimento, rilasciare il pulsante e dare nuovamente il comando desiderato;
- ripristino del livello di dimming al ritorno alimentazione;
- tenendo abilitato lo SWITCH per almeno 10 secondi è possibile portare al 30% il livello di regolazione;
- tenendo abilitato lo SWITCH per almeno 60 secondi è possibile abilitare la funzione **BILEVEL N**:
 - tenere premuto per mantenere il 100%;
 - al rilascio il FADE OFF è di 30 secondi, con livello 10%
 - il tempo di PROLONG è 30 minuti, poi OFF.

PUSH-SWITCH DIMMING


Light regulation 0/1 - 100 % by means of PUSH SWITCH function:

- a short push to turn on and off;
- a longer push to increase or decrease light intensity;
- regulation automatically stops at minimum and maximum value;
- for another on, regulation or off command, release the push button;
- dimming level memory at mains restore;
- keep enabled the SWITCH for at least 10 seconds to reset the dimming level to 30%;
- keep enabled the SWITCH for at least 60 seconds to enable **BILEVEL N** function:
 - keep pressed for 100% level;
 - FADE OFF time is 30 seconds, light level 10%;
 - PROLONG time is 30 minutes, then OFF.

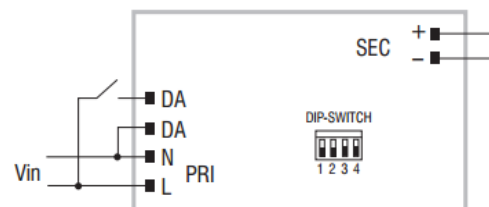

PUSH SWITCH diagram
Collegamento PUSH SWITCH

ENTE EMITTENTE: _____ Compilato: _____ Visto: _____

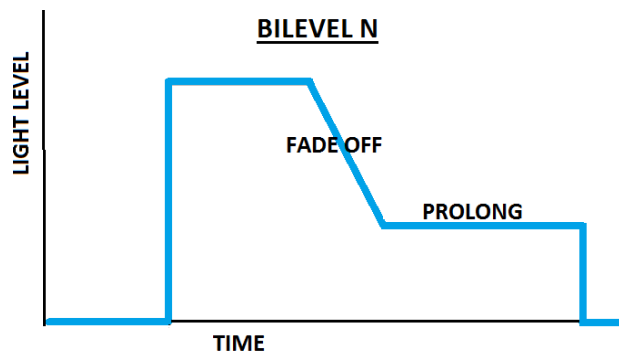

DALI Interface – supported commands

| Com- | Command Name | Implemented / Reaction |
|----------|---------------------------------------|------------------------|
| - | DIRECT ARC POWER CONTROL | yes |
| 0 | OFF | yes |
| 1 | UP | yes |
| 2 | DOWN | yes |
| 3 | STEP UP | yes |
| 4 | STEP DOWN | yes |
| 5 | RECALL MAX LEVEL | yes |
| 6 | RECALL MIN LEVEL | yes |
| 7 | STEP DOWN AND OFF | yes |
| 8 | ON AND STEP UP | yes |
| 9 | ENABLE DAPC SEQUENCE | yes |
| 10 | GO TO LAST ACTIVE LEVEL | yes |
| 16 – 31 | GOTO SCENE | yes |
| 32 | RESET | yes |
| 33 | STORE ACTUAL LEVEL IN THE DTR | yes |
| 34 | SAVE PERSISTENT VARIABLES | yes |
| 35 | SET OPERATING MODE | yes |
| 36 | RESET MEMORY BANK | yes |
| 37 | IDENTIFY DEVICE | yes |
| 42 | STORE THE DTR AS MAX LEVEL | yes |
| 43 | STORE THE DTR AS MIN LEVEL | yes |
| 44 | STORE THE DTR AS SYSTEM FAILURE LEVEL | yes |
| 45 | STORE THE DTR AS POWER ON LEVEL | yes |
| 46 | STORE THE DTR AS FADE TIME | yes |
| 47 | STORE THE DTR AS FADE RATE | yes |
| 48 | SET EXTENDED FADE TIME | yes |
| 64 – 79 | STORE THE DTR AS SCENE | yes |
| 80 – 95 | REMOVE FROM SCENE | yes |
| 96 – 111 | ADD TO GROUP | yes |

ENTE EMITTENTE: _____ Compilato: _____ Visto: _____

| Com- | Command Name | Implemented / Reaction |
|-----------|----------------------------------|------------------------|
| 112 – 127 | REMOVE FROM GROUP | yes |
| 128 | STORE DTR AS SHORT ADDRESS | yes |
| 129 | ENABLE WRITE MEMORY | yes |
| 144 | QUERY STATUS | yes |
| 145 | QUERY CONTROL GEAR | yes |
| 146 | QUERY LAMP FAILURE | yes |
| 147 | QUERY LAMP POWER ON | yes |
| 148 | QUERY LIMIT ERROR | yes |
| 149 | QUERY RESET state | yes |
| 150 | QUERY MISSING SHORT ADDRESS | yes |
| 151 | QUERY VERSION NUMBER | yes |
| 152 | QUERY CONTENT DTR | yes |
| 153 | QUERY DEVICE TYPE | yes |
| 154 | QUERY PHYSICAL MINIMUM LEVEL | yes |
| 155 | QUERY POWER FAILURE | yes |
| 156 | QUERY CONTENT DTR1 | yes |
| 157 | QUERY CONTENT DTR2 | yes |
| 158 | QUERY OPERATING MODE | yes |
| 159 | QUERY LIGHT SOURCE TYPE | yes |
| 160 | QUERY ACTUAL LEVEL | yes |
| 161 | QUERY MAX LEVEL | yes |
| 162 | QUERY MIN LEVEL | yes |
| 163 | QUERY POWER ON LEVEL | yes |
| 164 | QUERY SYSTEM FAILURE LEVEL | yes |
| 165 | QUERY FADE TIME/FADE RATE | yes |
| 166 | QUERY MANUFACTURER SPECIFIC MODE | yes |
| 167 | QUERY NEXT DEVICE TYPE | yes |
| 168 | QUERY EXTENDED FADE TIME | yes |
| 170 | QUERY CONTROL GEAR FAILURE | yes |
| 176 – 191 | QUERY SCENE LEVEL (SCENES 0-15) | yes |
| 192 | QUERY GROUPS 0-7 | yes |
| 193 | QUERY GROUPS 8-15 | yes |
| 194 | QUERY RANDOM ADDRESS (H) | yes |
| 195 | QUERY RANDOM ADDRESS (M) | yes |
| 196 | QUERY RANDOM ADDRESS (L) | yes |
| 197 | READ MEMORY LOCATION | yes |
| 224 | REFERENCE SYSTEM POWER | No |
| 225 | ENABLE CURRENT PROTECTOR | No |
| 226 | DISABLE CURRENT PROTECTOR | No |
| 227 | SELECT DIMMING CURVE | yes |


ENTE EMITTENTE: _____ Compilato: _____ Visto: _____

| Com- | Command Name | Implemented / Reaction |
|------|------------------------------------|------------------------|
| 228 | STORE DTR AS FAST FADE TIME | yes |
| 229 | --- | NA |
| 230 | --- | NA |
| 231 | --- | NA |
| 232 | --- | NA |
| 233 | --- | NA |
| 234 | --- | NA |
| 235 | --- | NA |
| 236 | --- | NA |
| 237 | QUERY GEAR TYPE | yes |
| 238 | QUERY DIMMING CURVE | yes |
| 239 | QUERY POSSIBLE OPERATING MODES | yes |
| 240 | QUERY FEATURES | yes |
| 241 | QUERY FAILURE STATUS | yes |
| 242 | QUERY SHORT CIRCUIT | yes |
| 243 | QUERY OPEN CIRCUIT | yes |
| 244 | QUERY LOAD DECREASE | no |
| 245 | QUERY LOAD INCREASE | no |
| 246 | QUERY CURRENT PROTECTOR ACTIVE | no |
| 247 | QUERY THERMAL SHUT DOWN | yes |
| 248 | QUERY THERMAL OVERLOAD | yes |
| 249 | QUERY REFERENCE RUNNING | no |
| 250 | QUERY REFERENCE MEASUREMENT FAILED | no |
| 251 | QUERY CURRENT PROTECTOR ENABLED | no |
| 252 | QUERY OPERATING MODE | yes |
| 253 | QUERY FAST FADE TIME | yes |
| 254 | QUERY MIN FAST FADE TIME | yes |
| 255 | QUERY EXTENDED VERSION NUMBER | yes |
| 256 | TERMINATE | yes |
| 257 | DATA TRANSFER REGISTER (DTR) | yes |
| 258 | INITIALISE | yes |
| 259 | RANDOMISE | yes |
| 260 | COMPARE | yes |
| 261 | WITHDRAW | yes |
| 262 | PING | yes |
| 264 | SEARCHADDRH | yes |
| 265 | SEARCHADDRM | yes |
| 266 | SEARCHADDRL | yes |
| 267 | PROGRAM SHORT ADDRESS | yes |
| 268 | VERIFY SHORT ADDRESS | yes |



ENTE EMITTENTE: _____ Compilato: _____ Visto: _____

| Com- | Command Name | Implemented / Reaction |
|------|--------------------------------|------------------------|
| 269 | QUERY SHORT ADDRESS | yes |
| 270 | PHYSICAL SELECTION | Not implemented |
| 272 | ENABLE DEVICE TYPE 6 | yes |
| 273 | DATA TRANSFER REGISTER 1(DTR1) | yes |
| 274 | DATA TRANSFER REGISTER 2(DTR2) | yes |
| 275 | WRITE MEMORY LOCATION | yes |
| 276 | WRITE MEMORY LOCATION NO REPLY | yes |

*PS In assenza del segnale DALI l'alimentatore eroga la massima potenza.
 The power supplier is at maximum power with DALI signal missing*

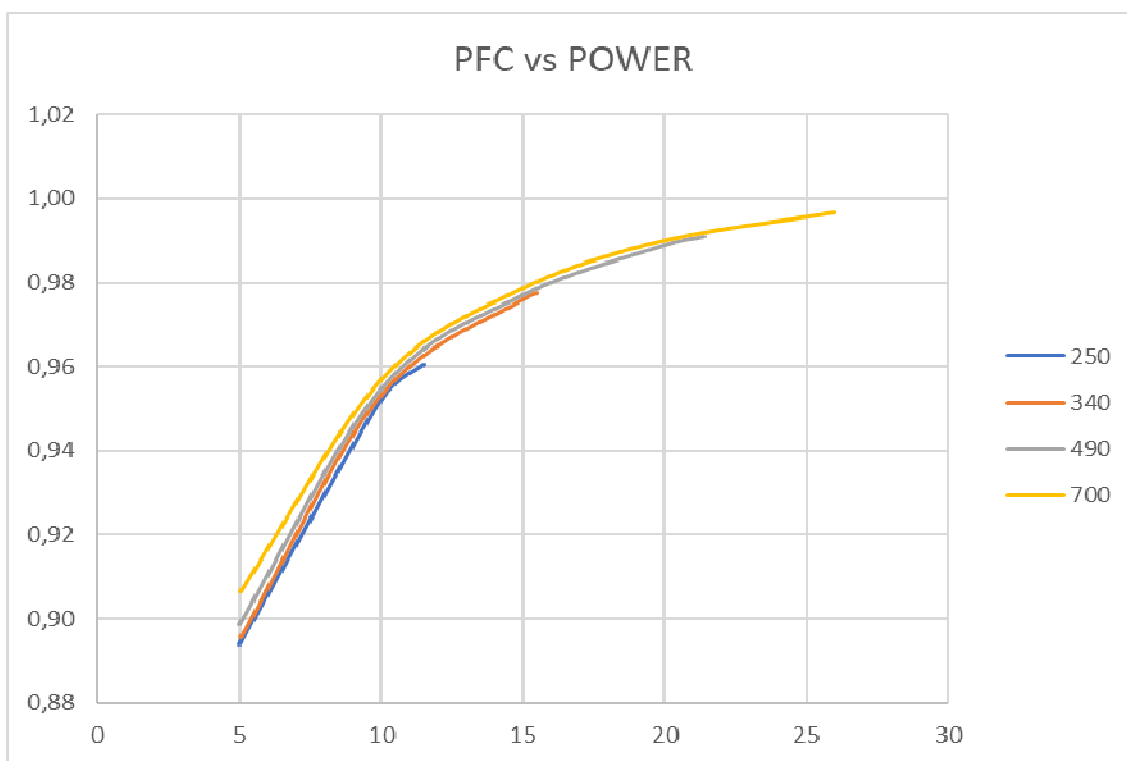

ENTE EMITTENTE: _____ Compilato: _____ Visto: _____

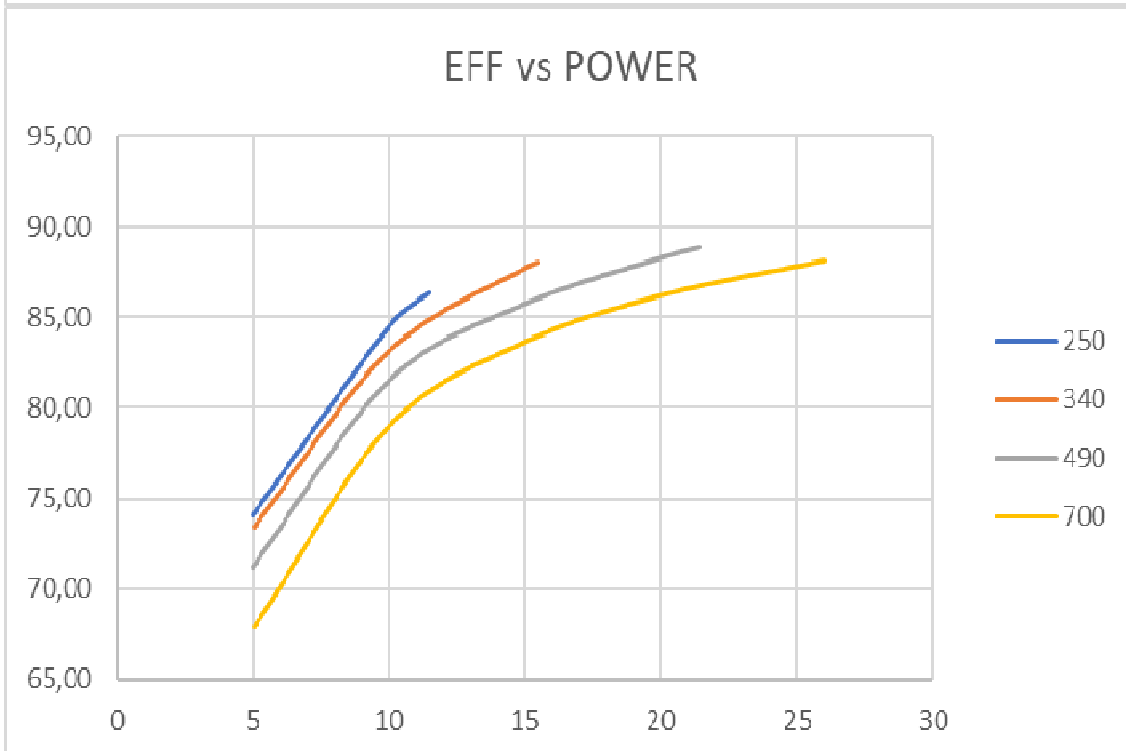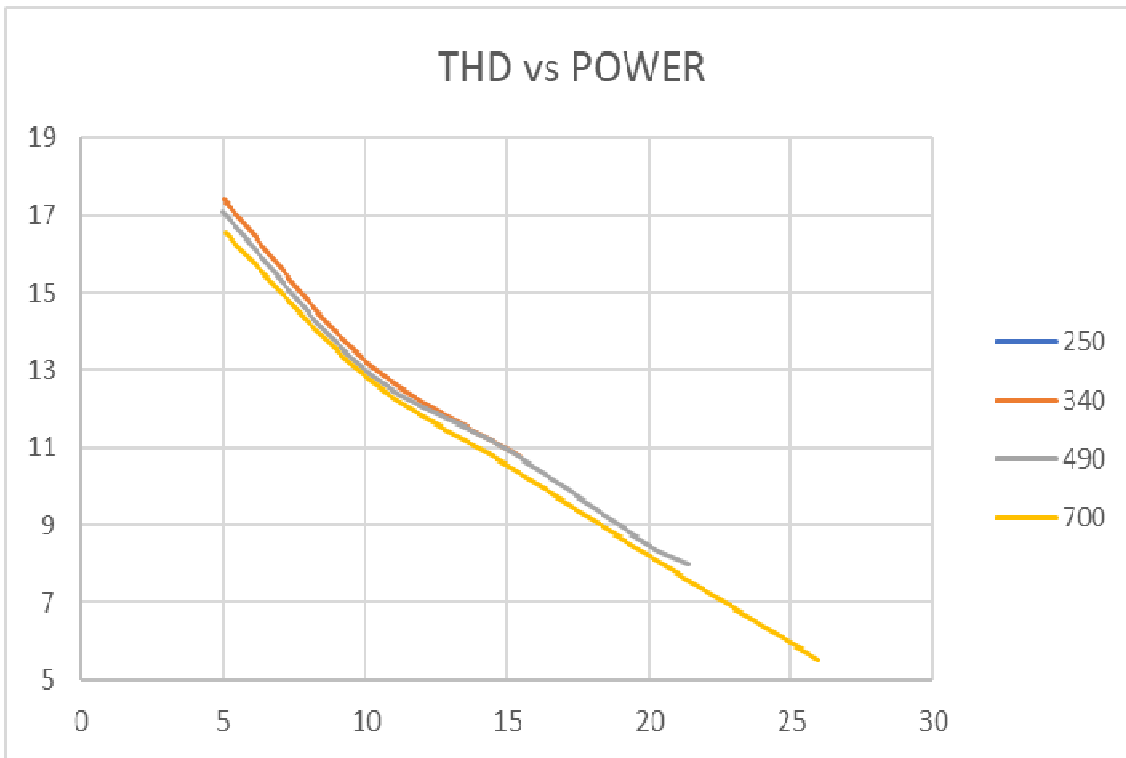

ENTE EMITTENTE: _____ Compilato: _____ Visto: _____