



BUILT-IN


Peso gr. 110

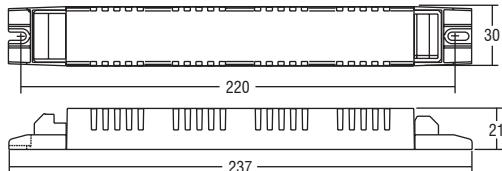

Articolo	Codice	P out W	V out DC ⁽¹⁾	I out DC	U out V	ta °C	tc °C	λ max. Power Factor	η max. Efficiency ⁽¹⁾	Pezzi	Prezzo							
MP 32 SLIM	123676	Uscita in corrente costante																
		13 (13 ⁽²⁾)	2...53	250 mA cost.	59	-25...+50	80	0,96	> 89 %	20	50,40							
		18 (15 ⁽²⁾)	2...53	350 mA cost.														
		21 (15 ⁽²⁾)	2...52	400 mA cost.														
		23 (15 ⁽²⁾)	2...52	450 mA cost.														
		26 (15 ⁽²⁾)	2...52	500 mA cost.														
		28 (15 ⁽²⁾)	2...52	550 mA cost.														
		30 (15 ⁽²⁾)	2...51	600 mA cost.														
		32 (15 ⁽²⁾)	2...46	700 mA cost.														
		Uscita in tensione costante																
		17 (15 ⁽²⁾)	24 cost.	700 mA max.														


BUILT-IN

Peso gr. 264

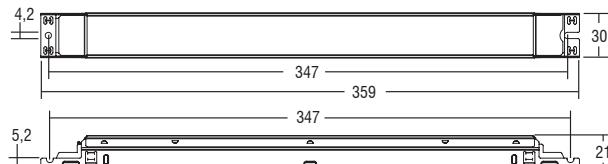

Articolo	Codice	P out W	V out DC	I out DC	U out V	ta °C	tc °C	λ Power Factor	η max. Efficiency ⁽¹⁾	Pezzi	Prezzo
MP 80/1400 SVM SLIM	127568	19,5	20...56	350 mA cost.	60	-25...+55	75	0,95 ⁽²⁾	> 91 %	20	84,00
		22	20...56	400 mA cost.							
		25	20...56	450 mA cost.							
		28	20...56	500 mA cost.							
		30,5	20...56	550 mA cost.							
		33,5	20...56	600 mA cost.							
		36	20...56	650 mA cost.							
		39	20...56	700 mA cost.							
		42	20...56	750 mA cost.							
		44,5	20...56	800 mA cost.							
		47,5	20...56	850 mA cost.							
		50	20...56	900 mA cost.							
		53	20...56	950 mA cost.							
		56	20...56	1000 mA cost.							
		58,5	20...56	1050 mA cost.							
		61,5	20...56	1100 mA cost.							
		64	20...56	1150 mA cost.							
		67	20...56	1200 mA cost.							
		70	20...56	1250 mA cost.							
		72,5	20...56	1300 mA cost.							
		75,5	20...56	1350 mA cost.							
		78	20...56	1400 mA cost.							