

**Track adapter with built-in LED driver**  
**Adattatore da binario con LED driver incorporato**

Made in Italy 

constant  
**CURRENT**

**RIPPLE FREE**

Pst LM  $\leq 1$   
SVM  $\leq 0,4$

**ERC**    



**2kV DIFF. 4kV COMM.**  **ACTIVE PFC**  **DIP-SWITCH**  **SEC. SWITCH**  **SAFETY PROTECTIONS** 

**Rated Voltage**  
**Tensione Nominale**  
220 ÷ 240 V

**Frequency**  
**Frequenza**  
50-60 Hz

**Rated Current**  
**Corrente Nominale**  
0,11 A

**Inrush Current**  
**Corrente di Spunto**  
5 A - 100  $\mu$ S

**Max. pcs for MCB B16A**  
50

**Output Power**  
**Potenza Uscita**  
10,5 ÷ 21 W

**Output current ripple**  
 $\leq 3\%$  <sup>(1)</sup>


Article Articolo	P out W	V out DC	I out DC	V out max.	ta °C	tc °C	$\lambda$ max. Power Factor	$\eta$ max. Efficiency <sup>(1)</sup>
<b>MILANOinTRACK 21/350-500</b>	14,7	30...42	350 mA	59	-20...+35	60	0,95 <sup>(2)</sup>	> 86 %
	16,8	30...42	400 mA					
	18,9	30...42	450 mA					
	21	30...42	500 mA					

<sup>(1)</sup> Referred to  $V_m = 230$  V, 100% load - Riferito a  $V_m = 230$  V, carico 100%



<sup>(2)</sup> Pout > 18 W

Article Articolo	Code Codice	Color Colore
<b>21/350-500</b>	127878W	White - Bianco RAL 9016
<b>21/350-500</b>	127878G	Grey - Grigio RAL 7040
<b>21/350-500</b>	127878B	Black - Nero RAL 9005

Pcs per box - pezzi per scatola: 20

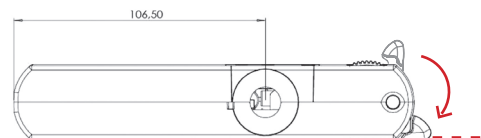

**WARNING:** During installation do not exceed the limit indicated - Risk of breakage.  
**ATTENZIONE:** in fase di installazione non superare questo limite - Pericolo di rottura.

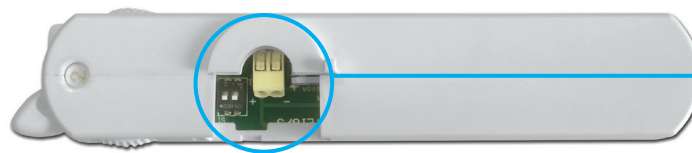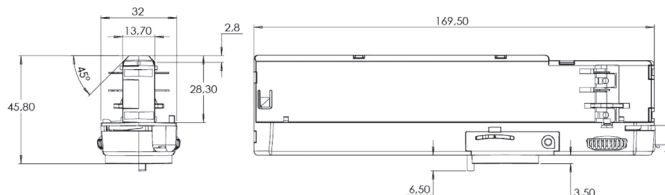

**Features**

- **Not dimmable driver.**
- A new breakthrough in luminaire design.
- Puts the luminaire design first.
- High power available in a very reduced space.
- Easy to mount through inventive nipple design.
- Compatible with NA Pro and Pulse 3-phase tracks.
- Multipower device supplied with dip-switch for the selection of the output current.
- Active Power Factor Corrector.
- Class II protection against electric shock for direct or indirect contact.
- Current regulation  $\pm 5/6\%$  including temperature variations.
- Output push-in terminal blocks: 0,2...0,75 mm<sup>2</sup>.
- Protections:
  - against overheating and short circuits;
  - against mains voltage spikes;
  - against overloads.
- Thermal protection = C.5.a.

**Caratteristiche**

- **Alimentatore non regolabile.**
- Design all'avanguardia.
- Il design della lampada prima di tutto.
- Elevata potenza disponibile in uno spazio molto ridotto.
- Facile da montare con innovativi attacchi.
- Compatibile con binario NA Pro e Pulse 3-phase.
- Dispositivo multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- PFC attivo.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Corrente regolata  $\pm 5/6\%$  incluse variazioni di temperatura.
- Morsetti di uscita ad innesto rapido: 0,2...0,75 mm<sup>2</sup>.
- Protezioni:
  - termica e cortocircuito;
  - contro le extra-tensioni di rete;
  - contro i sovraccarichi.
- Protezione termica = C.5.a.

**7 YEARS WARRANTY**  
3% FAILURE RATE

**10 YEARS WARRANTY**  
5% FAILURE RATE

PRODUCER'S LIABILITY  
**TCI**

WARRANTY 10 YEARS  
ACCORDING TO THE EUROPEAN CONDITIONS