

**Dimmer with DALI and push button for luminaires device with phase regulation**  
**Dimmer con controllo a pulsanti e DALI per apparecchi con regolazione taglio di fase**



LOAD TYPE	
Dimmable LED lamps	200W @ 230V / 100W @ 120V
Dimmable electronic drivers	200W @ 230V / 100W @ 120V
High voltage halogen lamps	400W @ 230V / 200W @ 120V
Low voltage halogen lamps with electronic transformer	200W @ 230V / 100W @ 120V

**Voltage**  
**Tensione**  
 110-230 V


**Frequency**  
**Frequenza**  
 50 Hz

**Power (LED)**  
**Potenza**  
 max. 200 W

**Standards compliance**  
 EN 55015  
 IEC 62386-101  
 IEC 62386-102  
 IEC 62386-207


Article Articolo	Code Codice	W max. (LED)	Volt / Hz	Load Carico	ta °C
SR-2303SAC-HP	181213	200	100-230 V / 50 Hz	IGBT	-10...+45

Weight - Peso gr. 41 / 1,44 oz.  
 Pcs - Pezzi 1




**Wiring diagram - Schema di collegamento**

(Max. LED distance on page info8 - Massima distanza LED a pagina info8)

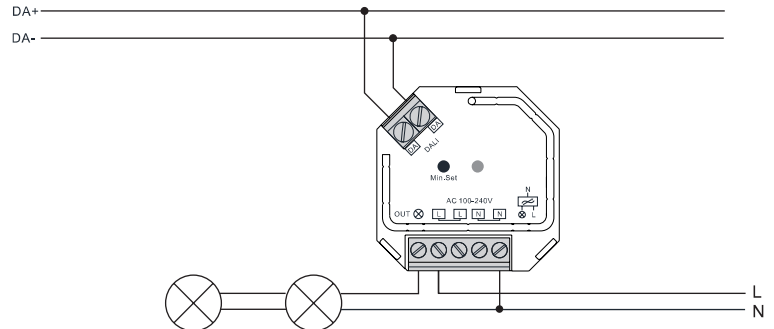

DALI MASTER connection

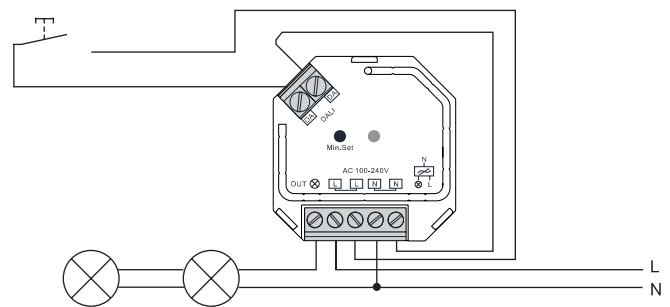

PUSH SWITCH connection

**Features**

- DALI/PUSH SWITCH regulation interface for phase cutting devices (Trailing edge).
- The interface can be addressed by the DALI master, only one address available.
- To guarantee operation, connect a maximum of 10 devices to the secondary side.
- Maximum cable length between the interface and connected devices 80 meters.
- Maximum cable length between push button/master and interface 80 meters.
- DALI port consumption 2mA max.
- Equipped with status LED.
- Application in the junction box.

**The instruction sheet is available on TCI website**  
[www.tci.it](http://www.tci.it)

**Caratteristiche**

- Interfaccia di regolazione DALI/PUSH SWITCH per apparecchi a taglio di fase (Trailing edge).
- L'interfaccia può essere indirizzata dal master DALI, solo un indirizzo disponibile.
- Per garantire il funzionamento collegare un massimo di 10 apparecchi sul secondario.
- Massima lunghezza cavo tra l'interfaccia e gli apparecchi connessi 80 metri.
- Massima lunghezza cavo tra pulsante/master e l'interfaccia 80 metri
- Consumo porta DALI 2mA max.
- Dotato di led di stato.
- Applicazione nella cassetta di derivazione.

**Il libretto di istruzione è disponibile sul nostro sito web**  
[www.tci.it](http://www.tci.it)