

Emergency light KIT for power LED and LED modules
KIT per luce d'emergenza per power LED e moduli LED

Made in Italy 



Voltage
Tensione
220 - 240 V

Frequency
Frequenza
50-60 Hz

Potenza
Power
3 W *

Supply current
Corrente di alimentazione
35 mA

Operating time
Autonomia
1-3 h

Charge time
Tempo di ricarica
24 h

ta °C: 5...+50

tc °C: 65

Standards compliance

EN 55015
EN 61000-3-2
EN 61347-2-7
EN 61547
EN 60598-2-22
EN 62034 ⁽¹⁾
EN 61000-3 3

				LiFePO4 BATTERY	
Article Articolo	Code Codice	EMERGENCY DURATION	GREEN/RED SIGNAL LED INCLUDED	Article Articolo	Code Codice
ELED 3W 12-55V 1H BI	123051	1h	✓	BATTERY LiFePO4 3,2V 3,2A	480550198BMS
ELED 3W 12-55V 3H BI	123051/3	3h	✓	BATTERY LiFePO4 3,2V 4,8A	480550199BMS
ELED-A 3W 12-55V 1H BI	123054	1h	✓	BATTERY LiFePO4 3,2V 3,2A	480550198BMS
ELED-A 3W 12-55V 3H BI	123054/3	3h	✓	BATTERY LiFePO4 3,2V 4,8A	480550199BMS

Only emergency driver, NO BATTERY - Solo driver emergenza, NO BATTERY		EMERGENCY DURATION		GREEN SIGNAL LED INCLUDED
Article Articolo	Code Codice	24h CHARGE		
ELED 3W 12-55V 1H BI	123051NB	1h		✓
ELED 3W 12-55V 3H BI	123051/3NB	3h		✓
ELED-A 3W 12-55V 1H BI	123054NB	1h		✓
ELED-A 3W 12-55V 3H BI	123054/3NB	3h		✓

⁽¹⁾ Only ELED-A: Self-test according to IEC 62034 (battery status, function test, battery life test).

Solo ELED-A: Autotest conforme alla IEC 62034 (stato della batteria, test di funzionamento, test durata batteria).

LED emergency KIT
KIT emergenza LED

8.

- It can be used for lighting equipment in protection class I and II.
- Instant emergency operation at mains failure.
- Maintained or not maintained operation (maintained operation suitable with electronic drivers or dimmable electronic drivers).
- LiFePO4 battery.
- Charge indicator with GREEN LED (ELED).
- Charge indicator with GREEN/RED LED (ELED-A).
- **Do not stock battery and kit connected together.**

- Utilizzabile per apparecchi di illuminazione in classe di protezione I e II.
- Intervento istantaneo ad ogni mancanza di rete.
- Funzionamento in sola emergenza o in luce continua (luce continua in abbinamento con alimentatori elettronici e alimentatori elettronici dimmerabili).
- Batteria LiFePO4.
- Indicatore di ricarica con LED VERDE (ELED).
- Indicatore di ricarica con LED VERDE/ROSSO (ELED-A).
- **Non immagazzinare collegati tra loro batteria e KIT.**



Technical data

- Terminal blocks max. connection size: 1,5 mm² / AWG15.
- Max distance between driver and lamp: 2 mt / 6 ft.

* See graph / vedi grafico

Dati tecnici

- Portata morsettiere: 1,5 mm² / AWG15.
- Distanza massima dall'alimentatore dalla lampada: 2 m / 6 ft.


Only for electronic inverter

The data shown are preliminary and may change - I dati riportati sono preliminari e potrebbero subire variazioni


Emergency light KIT for power LED and LED modules KIT per luce d'emergenza per power LED e moduli LED

Made in Italy 

BUILT-IN **SCREW FIXING**  Weight - Peso gr. 80 / 2,82 oz.
Pcs - Pezzi 50

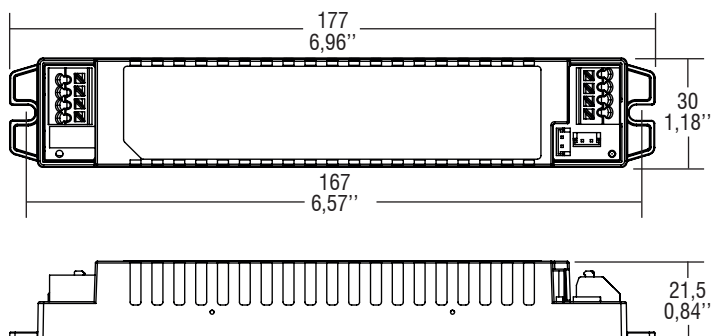


Wiring diagrams - Schemi di collegamento (max. LED distance: 2 mt / 6 ft - Distanza max. LED: 2 mt / 6 ft).

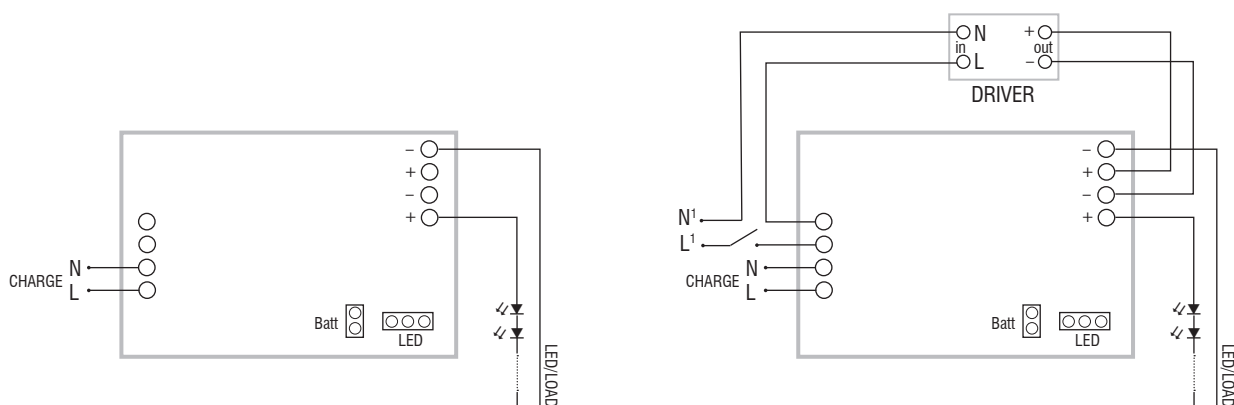

Non-maintained (emergency only) diagram
Collegamento non permanente (solo emergenza)

Maintained with external electronic driver diagram
Collegamento permanente (illuminazione ordinaria)

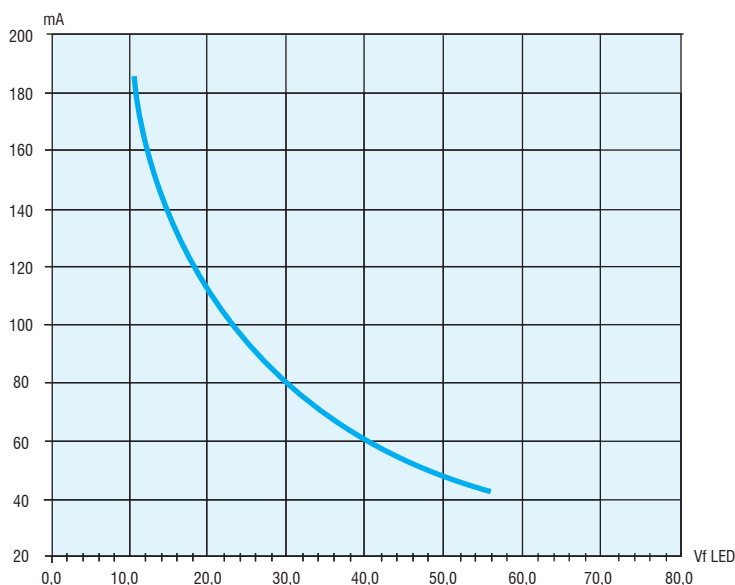


LED emergency KIT
KIT emergenza LED

8.



LiFePO4 BATTERY KIT

Battery KIT for ELED, ELED-A and ELED-DALI Series
KIT di batterie per Serie ELED, ELED-A e ELED-DALI


Made in Italy

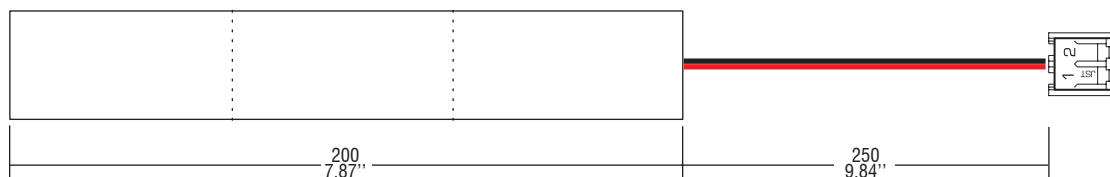


480550199BMS - BATTERY LiFePO4 3,2V 4,8A

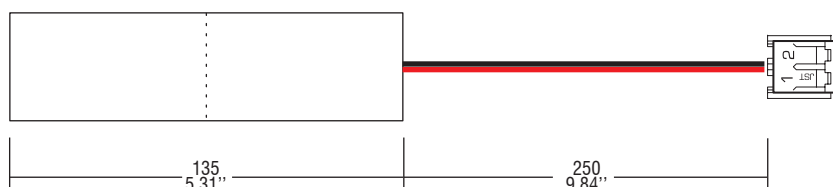

480550198BMS - BATTERY LiFePO4 3,2V 3,2A



BATTERY HOLDER

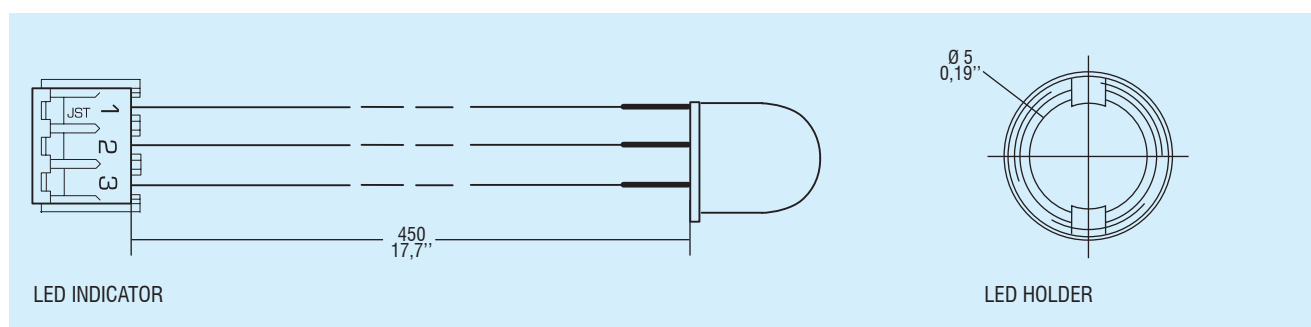

BATTERY

Rechargeable LiFePO4 batteries.

- Supply current 35 mA.
- Charge time 24 h.
- Operating ambient temperature up to 50°.
- BMS (Battery Management System) built-in thermal protection.
- Keep the battery not connected to the kit until the final installation of the system (luminaire installation).
- **Do not stock battery and kit connected together.**

The kit includes the battery, you can purchase only the battery and power supply.

BATTERIE

Batterie ricaricabili LiFePO4.

- Corrente di alimentazione 35 mA.
- Charge time 24 h.
- Temperatura ambiente di funzionamento fino a 50°.
- BMS (Battery Management System) protezione termica incorporata.
- Mantenere la batteria non connessa al KIT fino all'installazione finale del sistema (installazione della lampada).
- **Non immagazzinare collegati tra loro batteria e KIT.**

Il KIT include la batteria, è possibile acquistare separatamente sia la batteria che l'alimentatore.

LED emergency KIT
KIT emergenza LED

8.