


Direct current electronic drivers for 48V track adapters
Alimentatori elettronici in corrente continua per adattatori da binario 48V

Made in Italy

constant
CURRENT

**RIPPLE
FREE**

UL-LED CLASS2
EAC c us EN EC 05 100
CSA-LVLE

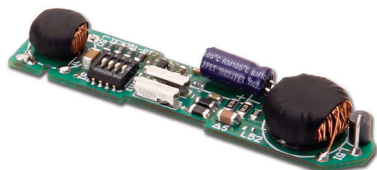

DIP-SWITCH **SEC. SWITCH** **SAFETY PROTECTIONS**

Rated Voltage
Tensione Nominale
48 Vdc

Power
Potenza
0 ÷ 28 W

Output current ripple
≤ 3%

Standards compliance
EN 55015
EN 61347-1
EN 61347-2-13
EN 61547
EN 62311
UL 8750
CSA C22.2 No.250.13


Suitable for the following tracks
Compatibili con il seguente binario
STUCCHI
9519-98

Article Articolo	Code Codice	W @48V	I out DC	DIP1	DIP2	DIP3	DIP4	U out V	ta °C	tc U1 °C	η max. Efficiency
LV HR TRACK SD OF	1260430F	6	150 mA cost.	-	-	-	-	48	-25...+50	95	> 91 %
		8	200 mA cost.	-	-	-	ON				
		10	250 mA cost.	-	-	ON	-				
		12	300 mA cost.	-	-	ON	ON				
		14	350 mA cost.	-	ON	-	-				
		16	400 mA cost.	-	ON	-	ON				
		18	450 mA cost.	-	ON	ON	-				
		20	500 mA cost.	-	ON	ON	ON				
		22	550 mA cost.	ON	-	-	-				
		24	600 mA cost.	ON	-	-	ON				
		26	650 mA cost.	ON	-	ON	-				
		28	700 mA cost.	ON	-	ON	ON				
		18	750 mA cost.	ON	ON	-	-				
		19	800 mA cost.	ON	ON	-	ON				
20	850 mA cost.	ON	ON	ON	-						
21	900 mA cost.	ON	ON	ON	ON						

BUILT-IN **SCREW FIXING**


Weight - Peso: gr. 9 / 0,32 oz.
Pcs - Pezzi 50

V in	V out
48 Vdc	3...40 V

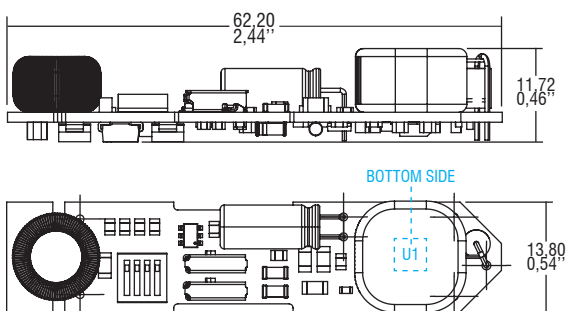

Wiring diagram - Schema di collegamento

(Max. LED distance at page info8 - Massima distanza LED a pagina info8)

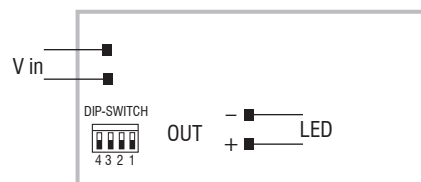

Features

- Not dimmable driver.
- Driver for built-in use.
- Extremely low safety voltage (48 V).
- It can be used for lighting equipment in protection class III.
- Input and output terminal blocks on opposite sides.
- Single terminal block on primary and secondary circuit (wire cross-section up to 0,75 mm² / AWG18).
- Ultra compact size.
- Protections:
 - against overheating and short-circuits;
 - polarity switching at input;
 - against overloads.
- Current regulation ± 5 % including temperature variations.

Caratteristiche

- Alimentatore non regolabile.
- Alimentatore da incorporare.
- Alimentazione in bassissima tensione di sicurezza (48 V).
- Utilizzabile per apparecchi di illuminazione in classe di protezione III.
- Morsetti di entrata ed uscita contrapposti.
- Singolo morsetto su primario e secondario (sezione cavo fino a 0,75 mm² / AWG18).
- Dimensioni molto ridotte e compatte.
- Protezioni:
 - termica e cortocircuito;
 - all'ingresso, inversione polarità;
 - contro i sovraccarichi.
- Corrente regolata ± 5 % incluse variazioni di temperatura.

The data shown are preliminary and may change - I dati riportati sono preliminari e potrebbero subire variazioni

48V LED driver track adapters
Alimentatore LED 48V per adattatori da binario

10.2

7 YEARS WARRANTY
3% FAILURE RATE

10 YEARS WARRANTY
5% FAILURE RATE

10 YEARS WARRANTY TO TEMPERATURE
ACCORDING TO THE OPERATING CONDITIONS