

DALI POWER POTI

DALI power potentiometer, flush mounting.
Potenziometro DALI, montaggio a parete

Made in Italy 



Rated Voltage
Tensione Nominale
AC 230 V


Frequency
Frequenza
50/60 Hz

Power consumption
Consumo di energia
max. 2,0 W

Standards compliance
IEC 62386-101/102

Article Articolo	Code Codice	DALI type	Power consumption Consumo di energia W	Output current Corrente in uscita mA	Power consumption Consumo di energia W	ta °C
DALI POWER POTI	180294	type 6	max. 2	max. 52	max. 2,0 W	-5...+45
DALI POWER POTI TW	180342	type 8	max. 2	max. 52	max. 2,0 W	-5...+45

Weight - Peso gr. 129 / 4,6 oz.
Pcs - Pezzi 1

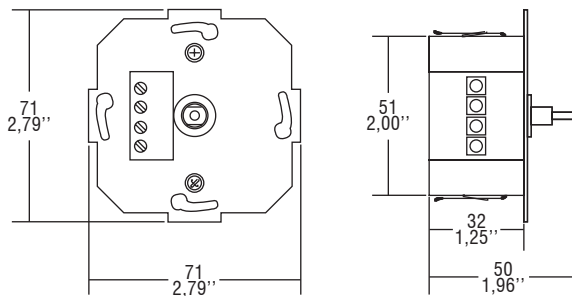

- DALI control unit with integrated power supply.
- Allows a common brightness control (broadcast) of up to 26 DALI stations without additional DALI power supply.
- Parallel switching of up to four DALI power pots extends the maximum number of DALI stations to 104.
- DALI communication cable length: max. 300 mt.
- Use of further DALI power pots as extension (without connection of the integrated power supply).
- Switching and dimming by pressing and turning the operation button.
- Storing of basic brightness and switch-on brightness.

- Unità di controllo DALI con alimentatore integrato.
- Consente un controllo della luminosità (trasmissione) sino ad un massimo di 26 punti senza alimentazione supplementare.
- Collegamento in parallelo di fino a quattro potenziometri DALI sino ad un massimo di 104 punti DALI.
- Lunghezza del cavo di comunicazione DALI: max. 300 metri.
- L'utilizzo di ulteriore potenza potis DALI come estensione (senza il collegamento all'alimentazione integrata).
- Accensione e dimmerazione premendo e girando il pulsante di funzionamento.
- Memorizzazione della luminosità dimpostata e dell'ultima luminosità impostata.