

MW 70 LED NOT DIMMABLE



12 V electronic transformer for LED bulbs and halogen lamps
Trasformatore elettronico 12 V per lampade LED e alogene

Made in Italy



Voltage
Tensione
230 ÷ 240 V

Frequency
Frequenza
50-60 Hz

Power
Potenza
2,5 ÷ 70 W


Standards compliance
EN 55015
EN 60598-1
EN 61000-3-2
EN 61347-1
EN 61347-2-2
EN 61547

Lamps
Lampade
Halogen lamps
LED bulbs

Article Articolo	Code Codice	Power out W	V in Vac	V out Vac 50 kHz	ta °C	tc °C	λ max. Power Factor	Colours Colori
MW 70 LED	119773	2,5 ÷ 70	230 ÷ 240	12 Vac	-25...40	90	0,98	White - Bianco





IP 20




Weight - Peso:
gr. 80 / 2,8 oz.
Pcs - Pezzi 30

Compatible with ZHAGA (AM6)

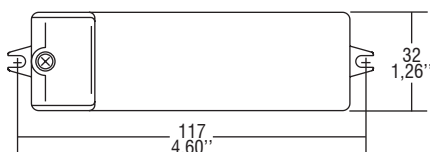

Wiring diagrams - Schemi di collegamento

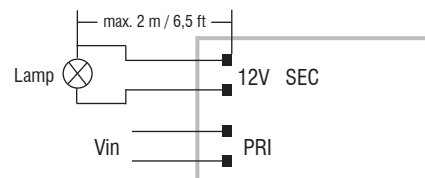

Features


- **Switchable electronic transformer.**
- IP20 independent transformer for lamps 12 Vac:
5 ÷ 70 halogen lamps;
2,5 ÷ 50 LED lamps (max. 4/5 lamps).
- Class II protection against electric shock for direct or indirect contact.
- Complete with terminal cover and cable retainer.
- Input and output terminal blocks on the same side (wire cross-section up to 0,5 - 2,5 mm² / AWG20 - AWG13).
- Clamping screws on primary and secondary circuits for cables with diameter: min. 3 mm - max. 6 mm.
- Max 18 mm cable peel-off.
- The transformer can be secured with slot for screws.
- Ultra compact size.
- Protections:
 - against overheating and short circuits.
 - against mains voltage spikes.
 - against overloads.

Before use always check the compatibility with the LED lamps of the application, including EMC verification of the complete system.

Caratteristiche

- **Trasformatore elettronico non regolabile.**
- Trasformatore indipendente IP20 per lampade 12 Vac:
5 ÷ 70 lampade alogene;
2,5 ÷ 50 lampade LED (max. 4/5 lampade).
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Fornito di coprimorsetto e fissacavo.
- Morsetti di entrata e uscita sullo stesso lato (sezione cavo fino a 0,5 - 2,5 mm² / AWG20 - AWG13).
- Serracavo su primario e secondario per cavi di diametro: min. 3 mm - max. 6 mm.
- Sguainatura dei cavi max. 18 mm.
- Fissaggio del trasformatore tramite asole per viti.
- Dimensioni ultra compatte.
- Protezioni:
 - termica e corto circuito.
 - contro le extra tensioni di rete.
 - contro i sovraccarichi.

Prima dell'uso verificare la compatibilità con le lampade LED dell'applicazione, inclusa verifica EMC del sistema completo.



Accessories and other products - Electronic transformers for retrofit LED lamps
Accessori e altri prodotti - Trasformatori elettronici per lampade LED e alogene

12.1