

**DALI power potentiometer, flush mounting.**  
**Potenzionetro DALI, montaggio a parete**




**Rated Voltage**  
**Tensione Nominale**  
 100 ÷ 240 V

**Frequency**  
**Frequenza**  
 50-60 Hz

**Power consumption**  
**Consumo di energia**  
 max. 2,3 W

Article Articolo	Code Codice	DALI type	Power consumption Consumo di energia W	Output current Corrente in uscita mA	ta °C
SR-2400 RB	181205	type 6	max. 2,3	max. 100	0...+50
SR-2400 RB-CCT	181206	type 8	max. 2,3	max. 100	0...+50

Weight - Peso gr. 215 / 7,58 oz.  
 Pcs - Pezzi 1

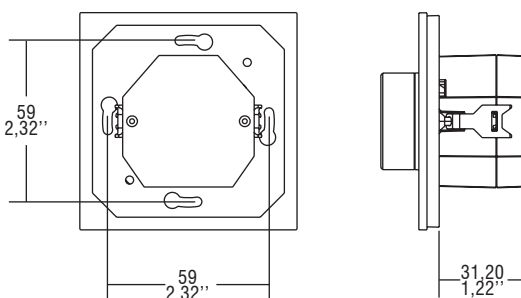

### Features

- Designed to work with DALI-2 systems.
- DALI control unit with integrated power supply.
- Allows a common brightness control (broadcast) of up to 50 DALI stations without additional DALI power supply.
- Parallel switching of up to four DALI power potis extends the maximum number of DALI stations to 100.
- DALI communication cable length: max. 300 mt.
- Use of further DALI power potis as extension (without connection of the integrated power supply).
- Switching and dimming by pressing and turning the operation button.
- Storing of basic brightness and switch-on brightness.

### Caratteristiche

- Progettato per funzionare con sistemi DALI-2.
- Unità di controllo DALI con alimentatore integrato.
- Consente un controllo della luminosità (trasmissione) sino ad un massimo di 50 punti senza alimentazione supplementare.
- Collegamento in parallelo di fino a quattro potenziometri DALI sino ad un massimo di 100 punti DALI.
- Lunghezza del cavo di comunicazione DALI: max. 300 metri.
- L'utilizzo di ulteriore potenza potis DALI come estensione (senza il collegamento all'alimentazione integrata).
- Accensione e dimmerazione premendo e girando il pulsante di funzionamento.
- Memorizzazione della luminosità dimpostata e dell'ultima luminosità impostata.