

Track adapter with built-in LED driver  
Adattatore da binario con LED driver incorporato

Made in Europe



constant  
CURRENT



**Rated Voltage**  
Tensione Nominale  
220 ÷ 240 V

**Frequency**  
Frequenza  
50-60 Hz

**Rated Current**  
Corrente Nominale  
0,22 A

**Inrush Current**  
Corrente di Spunto  
5,5 A - 160 μS

**Max. pcs for MCB B16A**  
50

**Output Power**  
Potenza Uscita  
24 ÷ 42 W

**Output current ripple**  
≤ 3% <sup>(1)</sup>


| Article<br>Articolo | P out<br>W | V out<br>DC | I out<br>DC | V out<br>max. | ta<br>°C  | tc<br>°C | λ max.<br>Power<br>Factor | η max.<br>Efficiency <sup>(1)</sup> |
|---------------------|------------|-------------|-------------|---------------|-----------|----------|---------------------------|-------------------------------------|
| GA 034 S            | 36         | 30...40     | 900 mA      | 59            | -20...+35 | 75       | 0,95 <sup>(2)</sup>       | > 87 %                              |
|                     | 38         | 30...40     | 950 mA      |               |           |          |                           |                                     |
|                     | 40         | 30...40     | 1000 mA     |               |           |          |                           |                                     |
|                     | 42         | 30...40     | 1050 mA     |               |           |          |                           |                                     |

<sup>(1)</sup> Referred to  $V_m = 230$  V, 100% load - Riferito a  $V_m = 230$  V, carico 100%



<sup>(2)</sup> Pout > 28 W

| Article<br>Articolo | Code<br>Codice | Color<br>Colore            |
|---------------------|----------------|----------------------------|
| GA 034 S            | 137883W        | White - Bianco<br>RAL 9016 |
| GA 034 S            | 137883G        | Grey - Grigio<br>RAL 7040  |
| GA 034 S            | 137883B        | Black - Nero<br>RAL 9005   |

Pcs per box - pezzi per scatola: 25

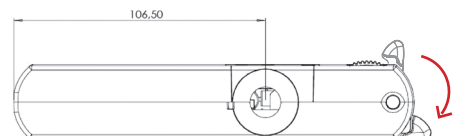

**WARNING:** During installation do not exceed the limit indicated - Risk of breakage.  
**ATTENZIONE:** in fase di installazione non superare questo limite - Pericolo di rottura.

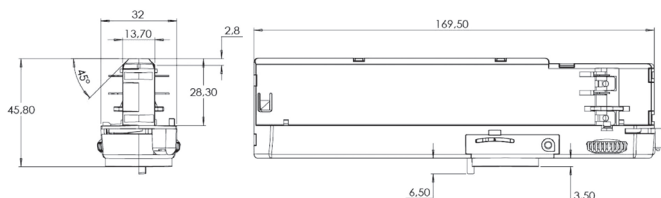

#### Features

- **Not dimmable driver.**
- A new breakthrough in luminaire design.
- Puts the luminaire design first.
- High power available in a very reduced space.
- Easy to mount through inventive nipple design.
- Multipower device supplied with dip-switch for the selection of the output current.
- Active Power Factor Corrector.
- Class II protection against electric shock for direct or indirect contact.
- Current regulation  $\pm 5$  % including temperature variations.
- Output push-in terminal blocks: 0,2...0,75 mm<sup>2</sup>.
- Protezioni:
  - against overheating and short circuits;
  - against mains voltage spikes;
  - against overloads.
- Thermal protection = C.5.a.

#### Caratteristiche

- **Alimentatore non regolabile.**
- Design all'avanguardia.
- Il design della lampada prima di tutto.
- Elevata potenza disponibile in uno spazio molto ridotto.
- Facile da montare con innovativi attacchi.
- Dispositivo multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- PFC attivo.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Corrente regolata  $\pm 5$  % incluse variazioni di temperatura.
- Morsetti di uscita ad innesto rapido: 0,2...0,75 mm<sup>2</sup>.
- Protezioni:
  - termica e cortocircuito;
  - contro le extra-tensioni di rete;
  - contro i sovraccarichi.
- Protezione termica = C.5.a.

