


LV 48V CV DALI

Direct current dimmable electronic drivers for 48V track adapters
Alimentatori elettronici regolabili in corrente continua per adattatori da binario 48V

Made in Italy 



Rated Voltage
Tensione Nominale
48 Vdc

Power
Potenza
1 ÷ 48 W

Maximum current output ripple
Max. ondulazione della corrente uscita
≤ 3%

Standards compliance
EN 55015
EN 61347-1
EN 61347-2-13
EN 61547
VDE 0710-T14



Suitable for the following tracks
Compatibili con i seguenti binari
STUCCHI
- 9500-../.-ST1
- 9500-../.-ST2
- 9500-../B-.-ST3
- 9500-../B-.-ST4

Article Articolo	Code Codice	W	I out DC	U out V	ta °C	tc Q1 °C	η max. Efficiency
LV 48V CV DALI OF	1260440F	48	1 A max.	57	-25...+60	90	> 93



Weight - Peso: gr. 8 / 0,3 oz.
Pcs - Pezzi 400

Wiring diagram - Schema di collegamento
(Max. LED distance at page info8 - Massima distanza LED a pagina info8)

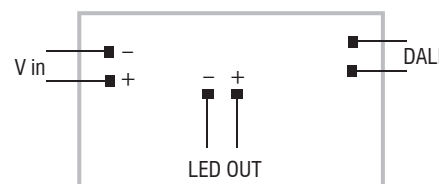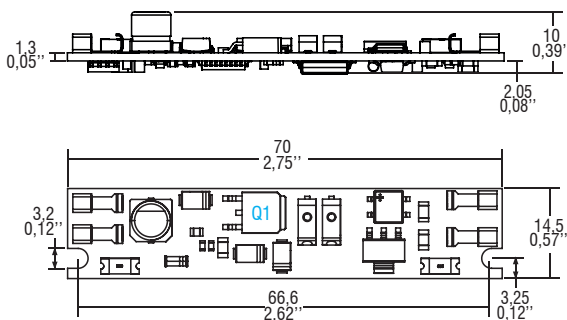

Features

- 48V to 48V dimmable converter.
- Suitable for STUCCHI series "9500" 48V track adapter.
- Light regulation 0/3 - 100 % by means of DALI interface.
- **Dimming PWM 240 Hz.**
- Driver for built-in use.
- Extremely low safety voltage (48 V).
- It can be used for lighting equipment in protection class III.
- Input and output terminal blocks on opposite sides.
- Single terminal block on primary and secondary circuit (wire cross-section up to 0,75 mm² / AWG19).
- Ultra compact size.
- Protections:
 - against 230V on DALI port;
 - against overheating and short-circuits;
 - against overloads.

Caratteristiche

- Convertitore dimmerabile 48V a 48V.
- **Compatibile con adattatore da binario 48V STUCCHI serie "9500".**
- Regolazione della luminosità 0/3 - 100 % mediante interfaccia DALI.
- **Regolazione PWM 240 Hz.**
- Alimentatore da incorporare.
- Alimentazione in bassissima tensione di sicurezza (48 V).
- Utilizzabile per apparecchi di illuminazione in classe di protezione III.
- Morsetti di entrata ed uscita contrapposti.
- Singolo morsetto su primario e secondario (sezione cavo fino a 0,75 mm² / AWG19).
- Dimensioni molto ridotte e compatte.
- Protezioni:
 - contro 230V su porta DALI;
 - termica e cortocircuito;
 - contro i sovraccarichi.



48V LED driver track adapters
Alimentatore LED 48V per adattatori da binario

10.2