

Direct current electronic drivers
Alimentatori elettronici in corrente continua

constant
VOLTAGE

RIPPLE FREE

Pst LM ≤ 1
SVM $\leq 0,4$

EAC KEMA EUR



Rated Voltage
Tensione Nominale
 220 ÷ 240 V

Frequency
Frequenza
 50-60 Hz

AC Operation range
Tensione di utilizzo AC
 198 ÷ 264 V

Power - Potenza
 0 ÷ 150 W

iTHD
 $\leq 20\%$ ⁽¹⁾

Output current ripple
 $\leq 3\%$ ⁽¹⁾

Standards compliance
 EN 55015
 EN 61000-3-2
 EN 61000-3-3
 EN 61347-1
 EN 61347-2-13
 EN 61547
 VDE 0710-T14

Max. pcs for CB B16A
 (see page info17)

30W: 36 pcs
 60W: 19 pcs
 100W: 12 pcs
 150W: 8 pcs

In rush current
 30W: 10A 30 μ sec
 60W: 38A 175 μ sec
 100W: 45A 230 μ sec
 150W: 64A 230 μ sec

Article Articolo	Code Codice	P out W	V out DC	I out DC	ta °C	tc °C	λ max. Power Factor	η max. Efficiency ⁽¹⁾
DC 30W 24V SLIM	127952	30	24 cost.	1,25 A max.	-20...+50	75	0,9 C	> 83 %
DC 60W 24V SLIM	127950	60	24 cost.	2,5 A max.	-20...+50	80	0,95	> 87 %
DC 100W 24V SLIM	127954	100	24 cost.	4,16 A max.	-20...+50	80	0,95	> 91 %
DC 150W 24V SLIM	127956	150	24 cost.	6,25 A max.	-20...+50	75	0,98	> 92 %

⁽¹⁾ Referred to $V_m = 230$ V, 100% load - Riferito a $V_m = 230$ V, carico 100%

Features

- Driver for built-in use.
- It can be used for lighting equipment in protection class I.
- Input and output terminal blocks on opposite sides.
- Single terminal at the primary and secondary circuit (wire cross-section up to 1,5 mm² / AWG15).
- Driver can be secured with slot for screws.
- Protections:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads;
 - protection fuse at input.

Caratteristiche


- Alimentatore da incorporare.
- Utilizzabile per apparecchi di illuminazione in classe di protezione I
- Morsetti di entrata e uscita contrapposti.
- Singolo morsetto su primario e secondario (sezione cavo fino a 1,5 mm² / AWG15).
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
 - termica e cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi;
 - fusibile di protezione all'ingresso.

5.2.1

Constant voltage drivers - Linear case - Not dimmable
 Alimentatori a tensione costante - Formato lineare - Non regolabili

Direct current electronic drivers Alimentatori elettronici in corrente continua


BUILT-IN **SCREW FIXING**

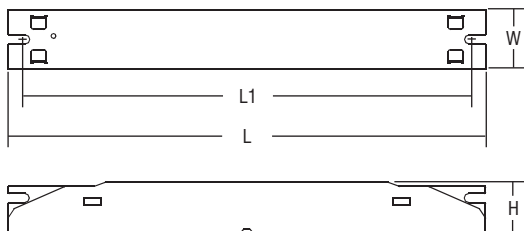


Articole Articolo	Dimensions - Dimensioni				Weight Peso	Pcs Pezzi
	L	L1	W	H		
DC 30W 24V SLIM	235	218,5	30	22	gr. 180 - 6,4 oz.	80
DC 60W 24V SLIM	280	265	30	22	gr. 307 - 10,8 oz.	56
DC 100W 24V SLIM	360	350	30,4	22,5	gr. 369 - 13 oz.	48
DC 150W 24V SLIM	425	415	45	22,5	gr. 575 - 20,3 oz.	24

Wiring diagram - Schema di collegamento


(Max. LED distance at page info8 - Massima distanza LED a pagina info8)

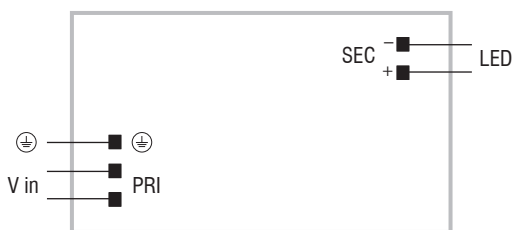


DC 30W 24V SLIM - DC 60W 24V SLIM

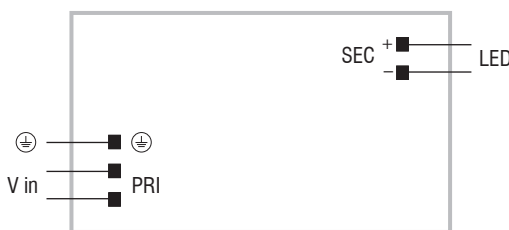

DC 100W 24V SLIM

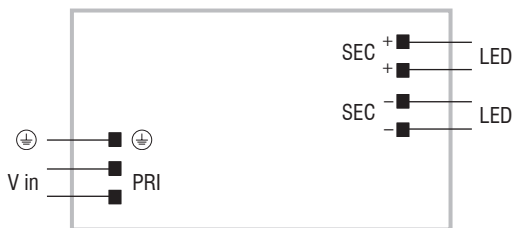

DC 150W 24V SLIM

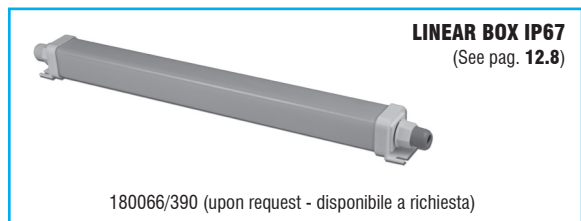

Excluded 150W

5.2.1

Constant voltage drivers - Linear case - Not dimmable
Alimentatori a tensione costante - Formato lineare - Non regolabili